

LT6375

Configurable High Voltage Amplifier

DESCRIPTION

Demonstration Circuit 2443 is a Configurable High Voltage Amplifier featuring the [LT[®]6375](#).

This demo board translates a high common mode signal to an output related to a low voltage reference level. The demo circuit is equipped with jumpers to facilitate setting the pin-strapped internal divider ratio configuration. The LT6375 is unique in that it may be powered from a low voltage (down to 3.3V) while it accepts signals well outside the supply range. This device is also unusual in

that it can operate with high supply voltages (up to 50V). Connection points are provided to wire the amplifier in other configurations besides the simple translator.

The key performance characteristics of the LT6375 and DC2443 are shown in the Performance Summary table.

Design files for this circuit board are available at <http://www.linear.com/demo/DC2443>

LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners.

PERFORMANCE SUMMARY Specifications are at T_A = 25°C

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
V _{IN+} , V _{IN-}	Input Range	V ⁺ , V ⁻ = ±15V, V _{REF} = 0	-270		270	V
V ⁺ , V ⁻	Amplifier Supply Range (Total if Split Supplies)		3.3	5...24	50	V
V _{OUT}	Output Signal		V ⁻ + 0.35		V ⁺ - 0.7	V
I _{OUT}	Output Current Range		±10	±25		mA
I _S	Supply Current	I _{OUT} = 0			385	μA
BW	Small Signal -3dB Bandwidth	Divider Ratio = 25		300		kHz

OPERATING PRINCIPLES

The LT6375 is an op amp that includes integrated precision resistors for providing many useful high accuracy functions with minimal external components. As a default on the demo circuit, the gain is 1.000 and includes pin-strappable common mode attenuations. Large vias and

some spare pads are also provided so that other more specialized configurations can be evaluated, such as precision gain blocks or summing amplifiers. The demo circuit also includes connector footprints for user-furnished BNC connectors if cable connectivity is desired.

QUICK START PROCEDURE

Demonstration Circuit 2443 is easy to set up to evaluate the performance of the LT6375. Refer to Figure 1 for proper evaluation equipment setup and follow the procedure below:

1. Place jumpers in the following positions:

JP1 – JP4, JP6 – JP8 to the GND position

JP5 to the SPLIT position

2. With power off, connect the power supply positive to V^+ , the supply negative to V^- and the common to GND. The supply should be preset in the range of $\pm 1.7V$ to $\pm 25V$.

3. Connect a voltmeter or oscilloscope probe to the OUT terminal, with the common connection or ground clip tied to GND.


4. Connect a signal source to the IN^+ and IN^- .

Note: Generators will typically be referenced to earth ground. An AC “cheater” plug may be needed so that a deliberate offset can be introduced with another power supply.

5. Turn on the power supplies.

6. Check for an output voltage that is a replica of the input source.

QUICK START PROCEDURE

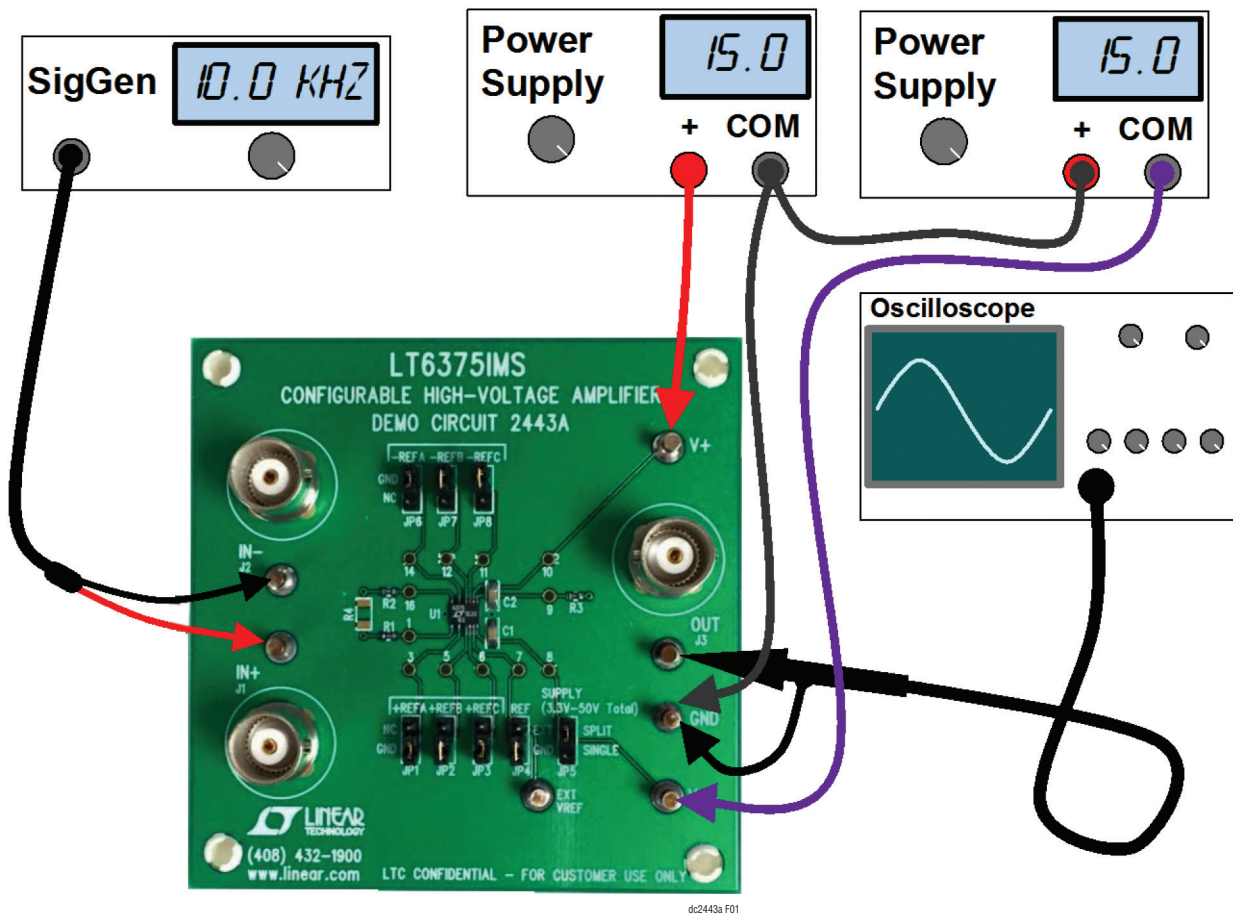

dc2443a F01

Figure 1. Proper Evaluation Equipment Setup

DEMO MANUAL DC2443

DEMONSTRATION BOARD IMPORTANT NOTICE

Linear Technology Corporation (LTC) provides the enclosed product(s) under the following **AS IS** conditions:

This demonstration board (DEMO BOARD) kit being sold or provided by Linear Technology is intended for use for **ENGINEERING DEVELOPMENT OR EVALUATION PURPOSES ONLY** and is not provided by LTC for commercial use. As such, the DEMO BOARD herein may not be complete in terms of required design-, marketing-, and/or manufacturing-related protective considerations, including but not limited to product safety measures typically found in finished commercial goods. As a prototype, this product does not fall within the scope of the European Union directive on electromagnetic compatibility and therefore may or may not meet the technical requirements of the directive, or other regulations.

If this evaluation kit does not meet the specifications recited in the DEMO BOARD manual the kit may be returned within 30 days from the date of delivery for a full refund. **THE FOREGOING WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY THE SELLER TO BUYER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. EXCEPT TO THE EXTENT OF THIS INDEMNITY, NEITHER PARTY SHALL BE LIABLE TO THE OTHER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES.**

The user assumes all responsibility and liability for proper and safe handling of the goods. Further, the user releases LTC from all claims arising from the handling or use of the goods. Due to the open construction of the product, it is the user's responsibility to take any and all appropriate precautions with regard to electrostatic discharge. Also be aware that the products herein may not be regulatory compliant or agency certified (FCC, UL, CE, etc.).

No License is granted under any patent right or other intellectual property whatsoever. **LTC assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or any other intellectual property rights of any kind.**

LTC currently services a variety of customers for products around the world, and therefore this transaction **is not exclusive**.

Please read the DEMO BOARD manual prior to handling the product. Persons handling this product must have electronics training and observe good laboratory practice standards. **Common sense is encouraged.**

This notice contains important safety information about temperatures and voltages. For further safety concerns, please contact a LTC application engineer.

Mailing Address:

Linear Technology
1630 McCarthy Blvd.
Milpitas, CA 95035

Copyright © 2004, Linear Technology Corporation