




(4) STANDOFFS TAPPED 1/4-28 X .38 [9.5] DEEP FOR MOUNTING BOLTS
 .88 [22.2] DIA. KNOCKOUT (2) PLACES FOR WIRING CONNECTIONS

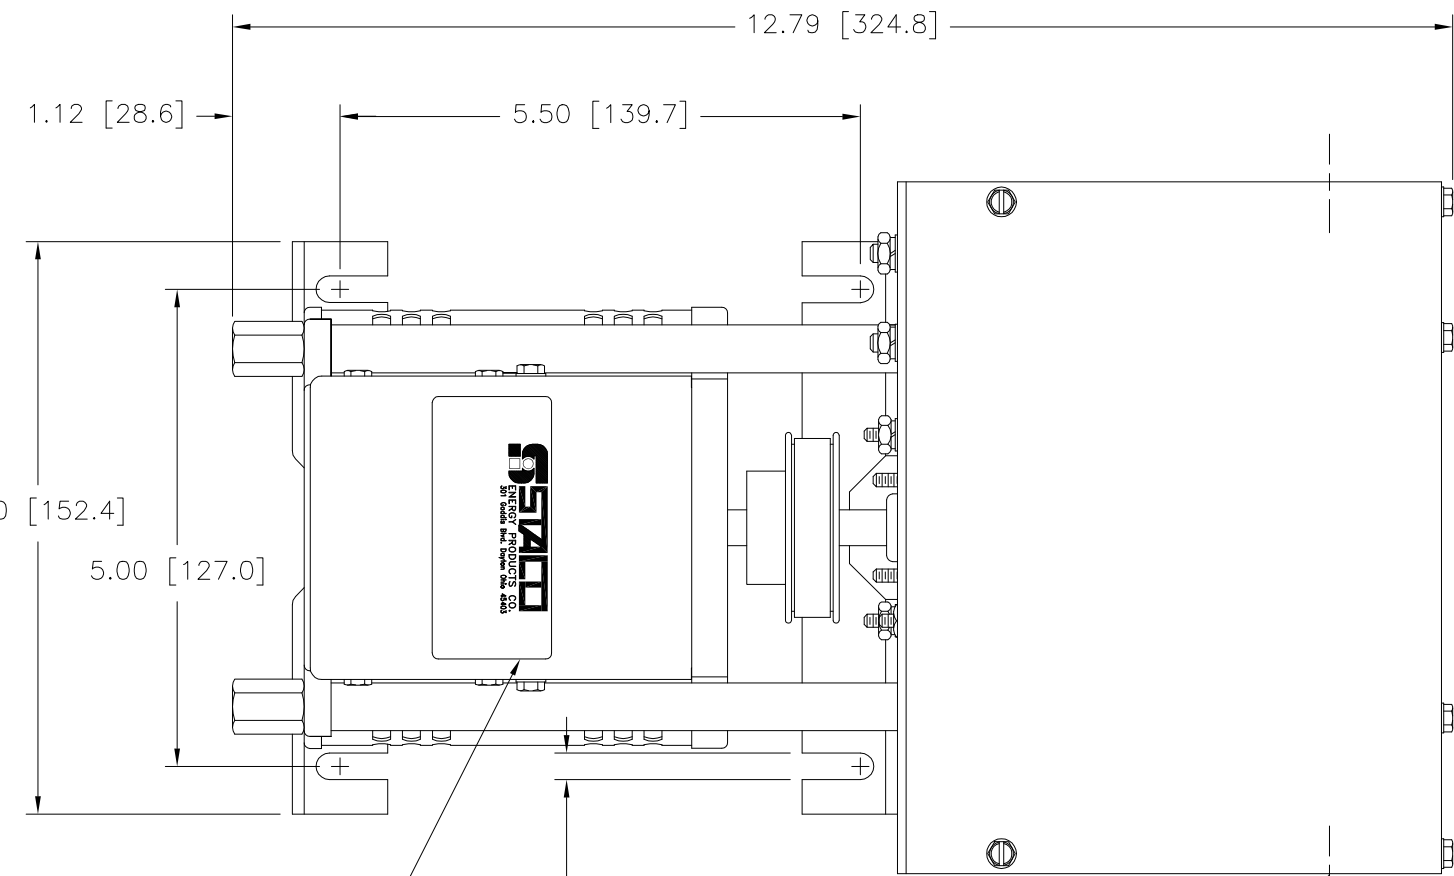

NAMEPLATE .28 [7.1] (4) PLACES FOR CUSTOMER MOUNTING
 .88 [22.2] DIA. KNOCKOUT (4) PLACES FOR MOTOR CONNECTIONS

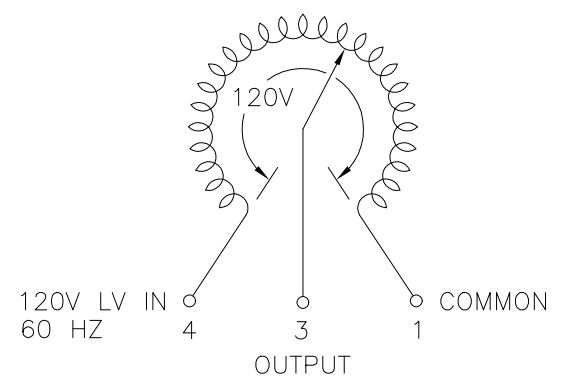

SCHEMATIC VIEW FROM BASE END
 FUSE RECOMMENDED BUT NOT SUPPLIED

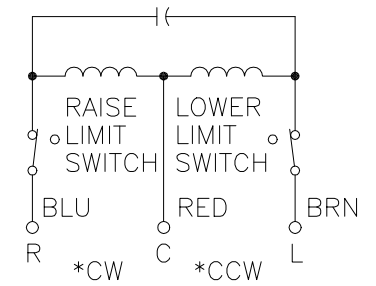

MOTOR CIRCUIT
 120V, 50/60 HZ
 * ROTATION AS VIEWED FROM MOTOR END
 MOTOR SPEED: SEE CHART

+ MOTOR DRIVEN UNITS USE TERMINAL CONNECTIONS FOR CCW INCREASING VOLTAGE, AS VIEWED FROM BASE END.

SPECIFICATIONS										
WIRING	INPUT		OUTPUT				SHAFT ROTATION TO INCREASE VOLTAGE	TERMINAL CONNECTIONS		
	VOLTS	HERTZ	VOLTS	CONSTANT CURRENT LOAD	CONSTANT IMPEDANCE LOAD	FOR INCREASING VOLTAGE AS VIEWED FROM BASE END +				
SINGLE PHASE	120	60	0-120	MAX. AMPS	MAX. KVA	MAX. AMPS	MAX. KVA	CW	JUMPER	OUTPUT
				12	1.44	15	1.80	1-4	---	4-3
								CCW	1-4	1-3

SPEED (SECONDS)	MODEL NUMBER
5	5M1210BCT
15	15M1210BCT
30	30M1210BCT
60	60M1210BCT

UNLESS OTHERWISE SPECIFIED, TOLERANCE IS # DECIMALS HOLES .002 ANGLES 1° DRAFT 1-1/2° UNITS IN [mm]

MATERIAL: ALL DIMENSIONS APPLY AFTER PLATING

THE INFORMATION AND DESIGN DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF STACO ENERGY PRODUCTS CO., WHICH RESERVES ALL PATENT, PROPRIETARY, DESIGN, MANUFACTURING, REPRODUCTION, USE AND SALE RIGHTS THEREIN, AND TO ANY ARTICLE DISCLOSED THEREIN EXCEPT TO THE EXTENT RIGHTS ARE EXPRESSLY GRANTED TO OTHERS. THE FOREGOING DOES NOT APPLY TO VENDOR PROPRIETARY PARTS.

WEIGHT APPROX. 16.75 LBS
 CODE IDENT. NO. 83008
 SCALE 1=1
 SHEET 1 OF 1

STACO ENERGY PRODUCTS CO. A COMPONENTS CORPORATION OF AMERICA COMPANY DAYTON, OHIO U.S.A.

DRAWN BY S.A. SMITH DATE 9/25/97
 CHECKER DATE
 ENGINEER DATE

DO NOT SCALE DWG.
 CUSTOMER APPROVAL DATE

DATE 9/25/97
 D 031-3160