



4D SYSTEMS

TURNING TECHNOLOGY INTO ART

4DLCD-FT843-Breakout

For the 4D Systems 4DLCD-FT843 Display

DATASHEET

Document Date: 8th January 2014
Document Revision: 1.0

Contents

1. Description	3
2. Configuration Options	4
2.1. Display Flex Connector (FPC).....	4
2.2. 10 way 2.54mm pitch Male Pin Header	4
3. Software Support	4
4. Hardware Support	4
5. Schematic Diagram	5
6. Mechanical Dimensions	6
7. Specifications and Ratings	7
8. Legal Notice	8
9. Contact Information	8

1. Description

The 4DLCD-FT843-Breakout is a simple breakout module designed specifically to interface the 4D Systems 4DLCD-FT843 Display (see 4D Systems' website) directly with a host. The breakout module provides the Host with a SPI Display powered by the FTDI FT800 Video Engine. The FT800 Video Engine features EVE (Embedded Video Engine), which takes care of many of the graphics functions from the Host.

The Breakout Module features a 10 way FPC connection to attach the 4DLCD-FT843 Display, along with a 10 way 2.54mm pitch male pin header to attach directly to a Host PCB or onto a Breadboard for prototyping.

Communication between the Host and the 4DLCD-FT843 display (via this Breakout) is by the SPI Bus, along with 4 digitals.

The Chip Select (CS) for the micro-SD card, the Chip Select (CS) for the Display, the Power Down (PD) for the Display, and the Host Interrupt (INT) for the Display, are the 4 digitals. The two CS pins are required to be used for the micro-SD and Display, and the PD and INT pins are optional but may be desired for some functionality.

The 4DLCD-FT843 also breaks out the Audio from the FT800 Video Engine, which can then be connected to an external filter and amplifier circuit if the user wishes to take advantage of this feature.

Power for the 4DLCD-FT843 Display comes via this Breakout board, and should be between 3.0 and 3.6V, Nominal 3.3V.


All signals from the 4DLCD-FT843 Display are 3.3V and are NOT 5V tolerant.

For details on each of the pins and their descriptions, please refer to the 4DLCD-FT843 Display Datasheet.

All software support for the 4DLCD-FT843 Display and FT800 Video Engine is provided directly from FTDI, who also write and supply the library and demos for this shield/display combo. Hardware support is provided by 4D Systems.



4DLCD-FT843 Breakout Module Top

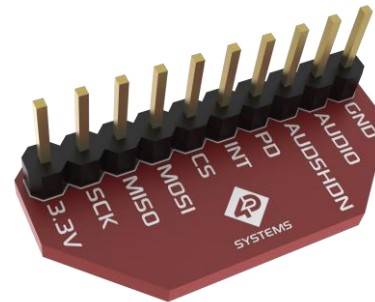

4DLCD-FT843 Breakout Module Bottom

2. Configuration Options

2.1. Display Flex Connector (FPC)

FPC is a 10 way Bottom Contact FPC connector, for connecting directly to the 4DLCD-FT843 displays flex. When connecting the display flex to the FPC connector, please ensure the display flex is located as far into the connector as possible, however ensure this is done with care as to not damage the delicate display flex.

NOTE: Please ensure the component section of the flex is not handled excessively and is not bent nor twisted, otherwise damage may result and the display will no longer function correctly. The thin portion of the flex which is used to connect to the ADAM Shield should also be handled with care, and not subjected to strain or excessive twisting and bending else damage could occur.

2.2. 10 way 2.54mm pitch Male Pin Header

The 10 way 2.54mm pitch Male Pin Header is designed to plug directly into a Host PCB, or into a breadboard/prototyping board. For a description of each of the pinouts, please refer to the 4DLCD-FT843 Display Datasheet which explains them in full, which is available from the products page on the 4D Systems' website, www.4dsystems.com.au

3. Software Support


All software relating to the 4DLCD-FT843 Display are supplied from FTDI Directly, and are not created nor maintained by 4D Systems.

4D Systems has created the 4DLCD-FT843-Breakout Module and the 4DLCD-FT843 Display hardware, however all software relating to these products are provided by FTDI. For any software support relating to these products, please refer to the FTDI Support Forum directly. <http://www.ftdichip.com/FTContact.htm>

4. Hardware Support

The 4DLCD-FT843 Display and the 4DLCD-FT843-Breakout hardware are supported by 4D Systems. Any issues regarding the hardware itself, please contact the 4D Systems Support team via the 4D Systems website, or on the 4D Systems Forum (also accessible from the 4D Systems website). www.4dsystems.com.au

5. Schematic Diagram

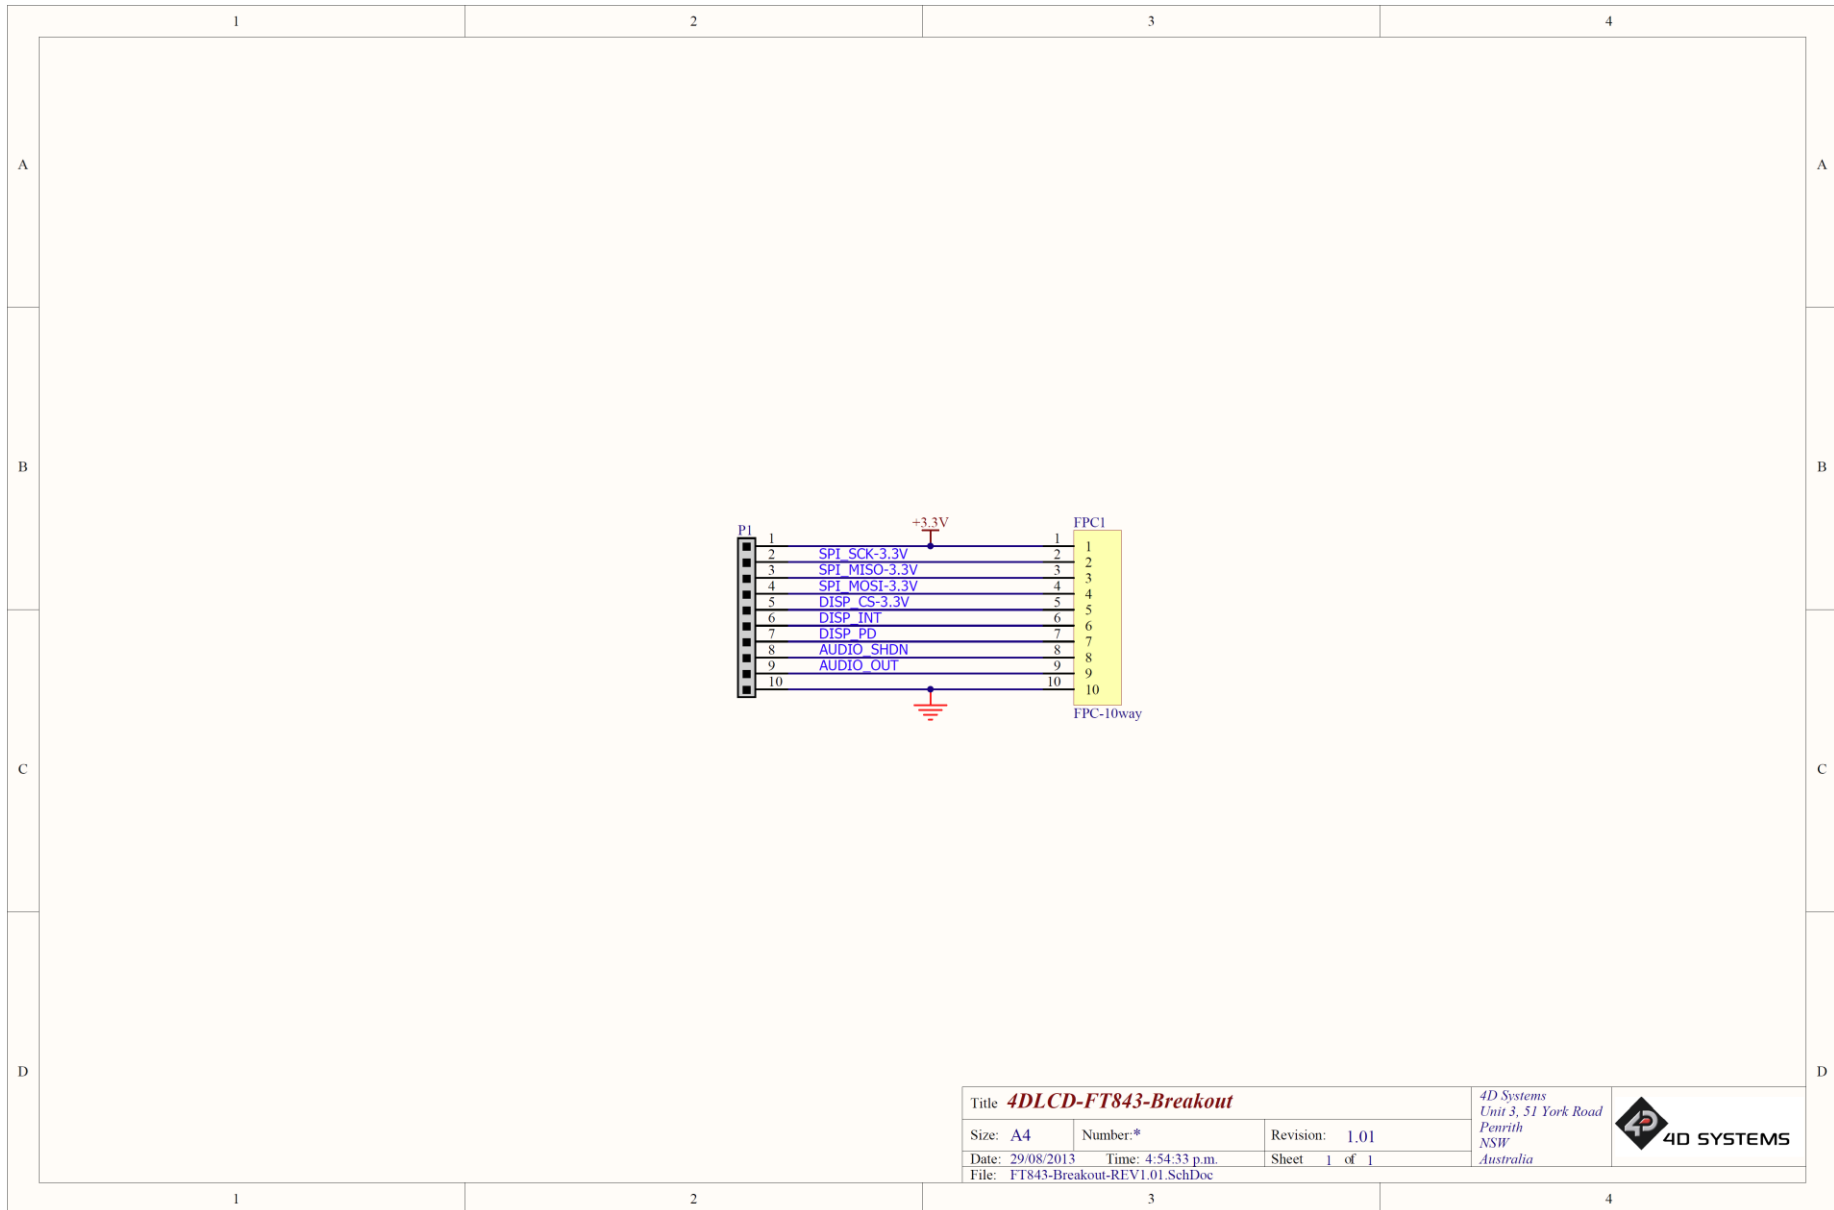


Title 4DLCD-FT843-Breakout		
Size: A4	Number:*	Revision: 1.01
Date: 29/08/2013	Time: 4:54:33 p.m.	Sheet 1 of 1
File: FT843-Breakout-REV1.01.SchDoc		

4D Systems
Unit 3, 51 York Road
Penrith
NSW
Australia



6. Mechanical Dimensions

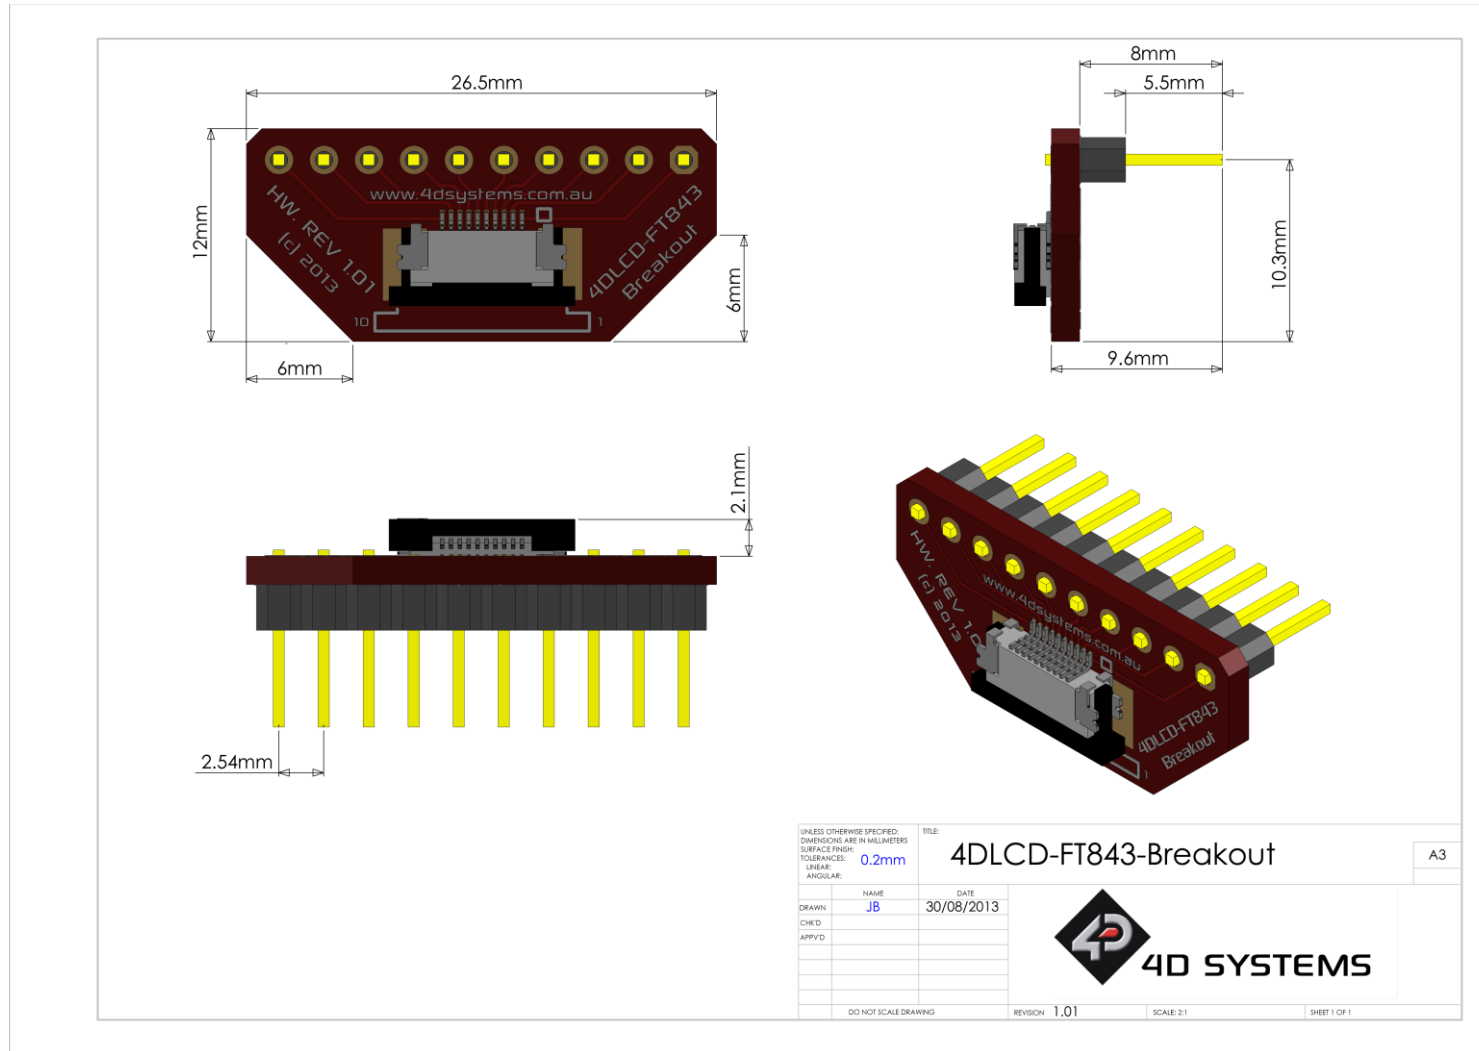

7. Specifications and Ratings

RECOMMENDED OPERATING CONDITIONS					
Parameter	Conditions	Min	Typ	Max	Units
Supply Voltage (VCC)		3.0	--	3.6	V
Operating Temperature		-10	--	+70	°C

ORDERING INFORMATION
<p>Order Code: 4DLCD-FT843-Breakout</p> <p>Packaging: Module sealed in antistatic foam padded 4D Systems Box</p>

8. Legal Notice

Proprietary Information

The information contained in this document is the property of 4D Systems Pty. Ltd. and may be the subject of patents pending or granted, and must not be copied or disclosed without prior written permission.

4D Systems endeavours to ensure that the information in this document is correct and fairly stated but does not accept liability for any error or omission. The development of 4D Systems products and services is continuous and published information may not be up to date. It is important to check the current position with 4D Systems. 4D Systems reserves the right to modify, update or make changes to Specifications or written material without prior notice at any time.

All trademarks belong to their respective owners and are recognised and acknowledged.

Disclaimer of Warranties & Limitation of Liability

4D Systems makes no warranty, either expressed or implied with respect to any product, and specifically disclaims all other warranties, including, without limitation, warranties for merchantability, non-infringement and fitness for any particular purpose.

Information contained in this publication regarding device applications and the like is provided only for your convenience and may be superseded by updates. It is your responsibility to ensure that your application meets with your specifications.

Images and graphics used throughout this document are for illustrative purposes only. All images and graphics used are possible to be displayed on the 4D Systems range of products, however the quality may vary.

In no event shall 4D Systems be liable to the buyer or to any third party for any indirect, incidental, special, consequential, punitive or exemplary damages (including without limitation lost profits, lost savings, or loss of business opportunity) arising out of or relating to any product or service provided or to be provided by 4D Systems, or the use or inability to use the same, even if 4D Systems has been advised of the possibility of such damages.

4D Systems products are not fault tolerant nor designed, manufactured or intended for use or resale as on line control equipment in hazardous environments requiring fail – safe performance, such as in the operation of nuclear facilities, aircraft navigation or communication systems, air traffic control, direct life support machines or weapons systems in which the failure of the product could lead directly to death, personal injury or severe physical or environmental damage ('High Risk Activities'). 4D Systems and its suppliers specifically disclaim any expressed or implied warranty of fitness for High Risk Activities.

Use of 4D Systems' products and devices in 'High Risk Activities' and in any other application is entirely at the buyer's risk, and the buyer agrees to defend, indemnify and hold harmless 4D Systems from any and all damages, claims, suits, or expenses resulting from such use. No licenses are conveyed, implicitly or otherwise, under any 4D Systems intellectual property rights.

9. Contact Information

For Technical Support: support@4dsystems.com.au

For Sales Support: sales@4dsystems.com.au

Website: www.4dsystems.com.au

Copyright 4D Systems Pty. Ltd. 2000-2014.