


1. Wiring Diagram.

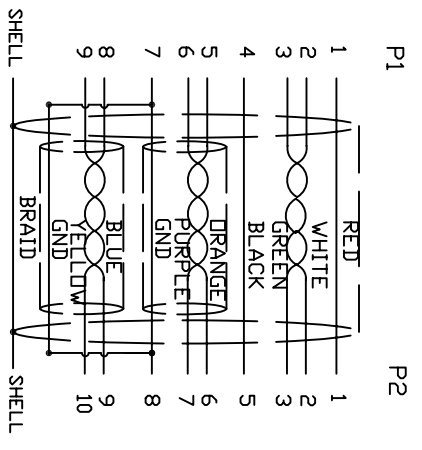

2. Cable test condition :

- Open / Short : 100%
- Insulation resistance : 5M ohms
- Contact resistance : 2 ohm
- Hipot : DC 300V / 1 sec

3. Each pcs with PE pallybag

6	CDRE	RH14.2*28.5*6.35mm	2																	
5	CONN	USB3.0 MICRO B MALE G/F BLACK	1	P2																
4	PVC	45P PVC BLACK OVERMOLD	25g																	
3	PE	LLDPE 500026 6201	16g																	
2	CONN	USB3.0 A/M G/F BLUE	1	P1																
1	CABLE	《28AWG (7/0.127T) *IP+D(7/0.127T)+AL+M》*2+28AWG (7/0.127T) *IP+24AWG(7/0.21T)*2C+A+D+B (11/6/0.12AM) OD5.5 BLACK	1	3000mm																
NO.	PART NO.	DESCRIPTION	QTY	UNIT/REF																
		BILL OF MATERIAL																		
		Cnc Tech,LLC																		
		DRAWN: EDWIN LAI																		
		CHECKED: WENG																		
		DATE: 11/24/15																		
		DATE: 11/24/15																		
		TITLE: USB3.0 A/M-MICRO B W/FRONTPTS,3M																		
		DWM NO. 103-1092-BL-F0300																		
		CUSTOMER P/N:																		
		CUSTOMER:																		
		SHEET 1 OF 1																		
		APPROVAL:																		
		REV: 1																		
		DATE: 2015/11/24																		