

CMPZDA2V4 THRU CMPZDA47V

**SURFACE MOUNT
DUAL, COMMON ANODE
SILICON ZENER DIODES
2.4 VOLTS THRU 47 VOLTS
350mW**



www.centrasemi.com

DESCRIPTION:

The CENTRAL SEMICONDUCTOR CMPZDA2V4 series dual silicon Zener diode is a high quality voltage regulator, connected in a common anode configuration, for use in industrial, commercial, entertainment and computer applications.

MARKING CODE: SEE MARKING CODES ON ELECTRICAL CHARACTERISTICS TABLE



SOT-23 CASE

MAXIMUM RATINGS: ($T_A=25^\circ\text{C}$)

Power Dissipation
Operating and Storage Junction Temperature
Thermal Resistance

SYMBOL

P_D 350
 T_J, T_{stg} -65 to +175
 θ_{JA} 429

UNITS

mW
 $^\circ\text{C}$
 $^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS PER DIODE: ($T_A=25^\circ\text{C}$) $V_F=0.9\text{V MAX @ } I_F=10\text{mA}$ (for all types)

| TYPE | ZENER VOLTAGE $V_Z @ I_{ZT}$ | | TEST CURRENT | MAXIMUM ZENER IMPEDANCE | | | MAXIMUM REVERSE CURRENT | | MAXIMUM ZENER CURRENT | MAXIMUM ZENER VOLTAGE TEMP. COEFF. | MARKING CODE |
|-----------|---------------------------------|------|--------------|-------------------------|-------------------|-----------------|-------------------------|----------------------|-----------------------|------------------------------------|--------------|
| | MIN | MAX | I_{ZT} | $Z_{ZT} @ I_{ZT}$ | $Z_{ZK} @ I_{ZK}$ | $I_R @ V_R$ | I_{ZM} | θV_Z | | | |
| | V | V | mA | Ω | Ω mA | μA V | mA | % / $^\circ\text{C}$ | | | |
| CMPZDA2V4 | 2.2 | 2.6 | 5.0 | 100 | 600 | 1.0 | 50 | 1.0 | 63 | -0.06 | WW3 |
| CMPZDA2V7 | 2.5 | 2.9 | 5.0 | 100 | 600 | 1.0 | 20 | 1.0 | 57 | -0.06 | WW4 |
| CMPZDA3V0 | 2.8 | 3.2 | 5.0 | 95 | 600 | 1.0 | 10 | 1.0 | 54 | -0.06 | WW5 |
| CMPZDA3V3 | 3.1 | 3.5 | 5.0 | 95 | 600 | 1.0 | 5.0 | 1.0 | 47 | -0.06 | WW6 |
| CMPZDA3V6 | 3.4 | 3.8 | 5.0 | 95 | 600 | 1.0 | 2.0 | 1.0 | 45 | -0.06 | WW7 |
| CMPZDA3V9 | 3.7 | 4.1 | 5.0 | 90 | 600 | 1.0 | 2.0 | 1.0 | 43 | -0.06 | WW8 |
| CMPZDA4V3 | 4.0 | 4.6 | 5.0 | 90 | 600 | 1.0 | 1.0 | 1.0 | 40 | -0.05 | WW9 |
| CMPZDA4V7 | 4.4 | 5.0 | 5.0 | 80 | 500 | 1.0 | 3.0 | 2.0 | 38 | -0.03 | ZZ1 |
| CMPZDA5V1 | 4.8 | 5.4 | 5.0 | 60 | 480 | 1.0 | 2.0 | 2.0 | 35 | 0.02 | ZZ2 |
| CMPZDA5V6 | 5.2 | 6.0 | 5.0 | 40 | 400 | 1.0 | 1.0 | 2.0 | 32 | 0.03 | ZZ3 |
| CMPZDA6V2 | 5.8 | 6.6 | 5.0 | 10 | 150 | 1.0 | 3.0 | 4.0 | 28 | 0.04 | ZZ4 |
| CMPZDA6V8 | 6.4 | 7.2 | 5.0 | 15 | 80 | 1.0 | 2.0 | 4.0 | 25 | 0.05 | ZZ5 |
| CMPZDA7V5 | 7.0 | 7.9 | 5.0 | 15 | 80 | 1.0 | 1.0 | 5.0 | 23 | 0.05 | ZZ6 |
| CMPZDA8V2 | 7.7 | 8.7 | 5.0 | 15 | 80 | 1.0 | 0.7 | 5.0 | 21 | 0.06 | ZZ7 |
| CMPZDA9V1 | 8.5 | 9.6 | 5.0 | 15 | 100 | 1.0 | 0.5 | 6.0 | 18 | 0.06 | ZZ8 |
| CMPZDA10V | 9.4 | 10.6 | 5.0 | 20 | 150 | 1.0 | 0.2 | 7.0 | 16 | 0.07 | ZZ9 |
| CMPZDA11V | 10.4 | 11.6 | 5.0 | 20 | 150 | 1.0 | 0.1 | 8.0 | 15 | 0.07 | YY1 |
| CMPZDA12V | 11.4 | 12.7 | 5.0 | 25 | 150 | 1.0 | 0.1 | 8.0 | 13 | 0.07 | YY2 |
| CMPZDA13V | 12.4 | 14.1 | 5.0 | 30 | 170 | 1.0 | 0.1 | 8.0 | 12 | 0.08 | YY3 |
| CMPZDA15V | 13.8 | 15.6 | 5.0 | 30 | 200 | 1.0 | 0.05 | 10.5 | 11 | 0.08 | YY4 |
| CMPZDA16V | 15.3 | 17.1 | 5.0 | 40 | 200 | 1.0 | 0.05 | 11.2 | 10 | 0.08 | YY5 |
| CMPZDA18V | 16.8 | 19.1 | 5.0 | 45 | 225 | 1.0 | 0.05 | 12.6 | 9.2 | 0.08 | YY6 |
| CMPZDA20V | 18.8 | 21.2 | 5.0 | 55 | 225 | 1.0 | 0.05 | 14.0 | 8.3 | 0.08 | YY7 |
| CMPZDA22V | 20.8 | 23.3 | 5.0 | 55 | 250 | 1.0 | 0.05 | 15.4 | 7.6 | 0.09 | YY8 |

R9 (10-August 2012)

CMPZDA2V4 THRU CMPZDA47V


**SURFACE MOUNT
DUAL, COMMON ANODE
SILICON ZENER DIODES
2.4 VOLTS THRU 47 VOLTS
350mW**



ELECTRICAL CHARACTERISTICS PER DIODE - Continued: ($T_A=25^\circ\text{C}$) $V_F=0.9\text{V MAX @ } I_F=10\text{mA}$ (for all types)


| TYPE | ZENER VOLTAGE $V_Z @ I_{ZT}$ | | TEST CURRENT | MAXIMUM ZENER IMPEDANCE | | | MAXIMUM REVERSE CURRENT | | MAXIMUM ZENER CURRENT | MAXIMUM ZENER VOLTAGE TEMP. COEFF. | MARKING CODE |
|-----------|------------------------------|------|--------------|-------------------------|-------------------|-------------------|-------------------------|----------------------|-----------------------|------------------------------------|--------------|
| | MIN | MAX | I_{ZT} | $Z_{ZT} @ I_{ZT}$ | $Z_{ZK} @ I_{ZK}$ | $I_R @ V_R$ | I_{ZM} | Θ_{VZ} | | | |
| | V | V | mA | Ω | Ω | $\mu\text{A @ V}$ | mA | % / $^\circ\text{C}$ | | | |
| CMPZDA24V | 22.8 | 25.6 | 5.0 | 70 | 250 | 1.0 | 0.05 | 16.8 | 7.0 | 0.09 | YY9 |
| CMPZDA27V | 25.1 | 28.9 | 2.0 | 80 | 300 | 0.5 | 0.05 | 18.9 | 6.2 | 0.09 | W10 |
| CMPZDA30V | 28.0 | 32.0 | 2.0 | 80 | 300 | 0.5 | 0.05 | 21.0 | 5.6 | 0.09 | W11 |
| CMPZDA33V | 31.0 | 35.0 | 2.0 | 80 | 325 | 0.5 | 0.05 | 23.1 | 5.0 | 0.09 | W12 |
| CMPZDA36V | 34.0 | 38.0 | 2.0 | 90 | 350 | 0.5 | 0.05 | 25.2 | 4.6 | 0.09 | W13 |
| CMPZDA39V | 37.0 | 41.0 | 2.0 | 130 | 350 | 0.5 | 0.05 | 27.3 | 4.3 | 0.09 | W14 |
| CMPZDA43V | 40.0 | 46.0 | 2.0 | 150 | 375 | 0.5 | 0.05 | 30.1 | 3.9 | 0.10 | W15 |
| CMPZDA47V | 44.0 | 50.0 | 2.0 | 170 | 375 | 0.5 | 0.05 | 32.9 | 3.5 | 0.10 | W16 |

SOT-23 CASE - MECHANICAL OUTLINE

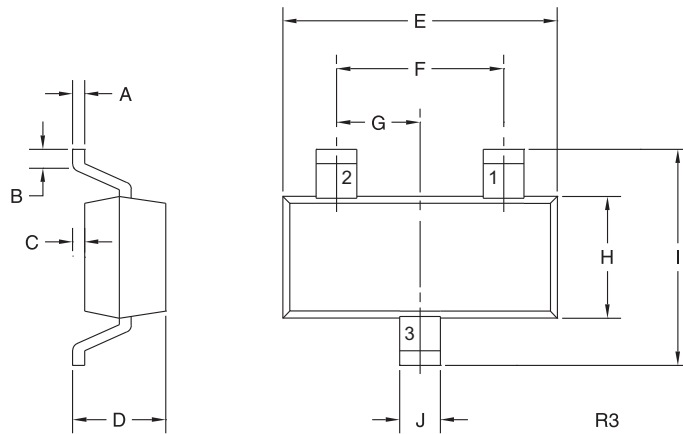

| SYMBOL | INCHES | | MILLIMETERS | |
|--------|--------|-------|-------------|------|
| | MIN | MAX | MIN | MAX |
| A | 0.003 | 0.007 | 0.08 | 0.18 |
| B | 0.006 | - | 0.15 | - |
| C | - | 0.005 | - | 0.13 |
| D | 0.035 | 0.043 | 0.89 | 1.09 |
| E | 0.110 | 0.120 | 2.80 | 3.05 |
| F | 0.075 | | 1.90 | |
| G | 0.037 | | 0.95 | |
| H | 0.047 | 0.055 | 1.19 | 1.40 |
| I | 0.083 | 0.098 | 2.10 | 2.49 |
| J | 0.014 | 0.020 | 0.35 | 0.50 |

SOT-23 (REV: R3)

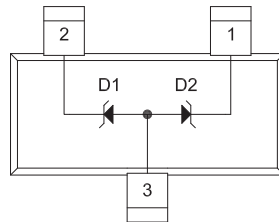

LEAD CODE:

- 1) Cathode D2
- 2) Cathode D1
- 3) Anode D1, D2

MARKING CODE:

SEE MARKING CODES ON ELECTRICAL CHARACTERISTICS TABLE

R9 (10-August 2012)

OUTSTANDING SUPPORT AND SUPERIOR SERVICES



PRODUCT SUPPORT

Central's operations team provides the highest level of support to insure product is delivered on-time.

- Supply management (Customer portals)
- Inventory bonding
- Consolidated shipping options
- Custom bar coding for shipments
- Custom product packing

DESIGNER SUPPORT/SERVICES

Central's applications engineering team is ready to discuss your design challenges. Just ask.

- Free quick ship samples (2nd day air)
- Online technical data and parametric search
- SPICE models
- Custom electrical curves
- Environmental regulation compliance
- Customer specific screening
- Up-screening capabilities
- Special wafer diffusions
- PbSn plating options
- Package details
- Application notes
- Application and design sample kits
- Custom product and package development

REQUESTING PRODUCT PLATING

1. If requesting Tin/Lead plated devices, add the suffix " TIN/LEAD" to the part number when ordering (example: 2N2222A TIN/LEAD).
2. If requesting Lead (Pb) Free plated devices, add the suffix " PBFREE" to the part number when ordering (example: 2N2222A PBFREE).

CONTACT US

Corporate Headquarters & Customer Support Team

Central Semiconductor Corp.
145 Adams Avenue
Hauppauge, NY 11788 USA
Main Tel: (631) 435-1110
Main Fax: (631) 435-1824
Support Team Fax: (631) 435-3388
www.centrasemi.com

Worldwide Field Representatives:
www.centrasemi.com/wwreps

Worldwide Distributors:
www.centrasemi.com/wwdistributors

For the latest version of Central Semiconductor's **LIMITATIONS AND DAMAGES DISCLAIMER**, which is part of Central's Standard Terms and Conditions of sale, visit: www.centrasemi.com/terms