I. MATERIAL AND FINISH (PLATING THICKNESS IN INCHES): BODY - BRASS, GOLD PLATING, .000030 [0.8 um] THICK CONTACT - BRASS, GOLD PLATING, .000030 [0.8 um] THICK INSULATOR - PEEK, NATURAL

2. ELECTRICAL:

A. IMPEDANCE: 50 OHM

B. FREQUENCY RANGE: DC - 6 GHz

C. VSWR(RETURN LOSS): 1.10 (26.4 dB), MAX. DC-2GHz

D. DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS, MIN.

3. PHYSICAL:


A. DURABILTIY: 500 CYCLES MIN.

B. ENGAGEMENT FORCE: 9 LB [40 N] MAX


C. DISINGAGEMENT FORCE: 2 LB [8.8 N] MIN D. INNER CONTACT RETENTION FORCE: 1.5 LB [7 N] MIN E. TEMERATURE RANGE: -65° C TO 165° C

THIRD ANGLE PROJ. 🕀 🖯


	REVISIONS				
REV	DESCRIPTION	DATE	ECO	APPR	
А	RELEASE TO MFG	3/2/05	45425	WAH	
В	ADDED RECOMMENDED PCB\RD-DMI005260IJI	01-Jun-10	48105	SH	




SCALE 4.000

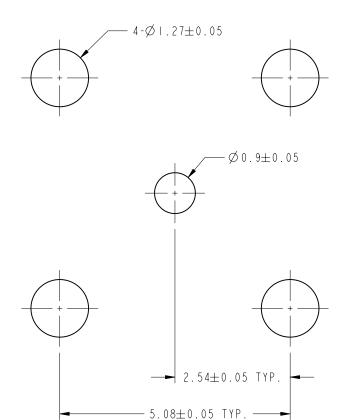



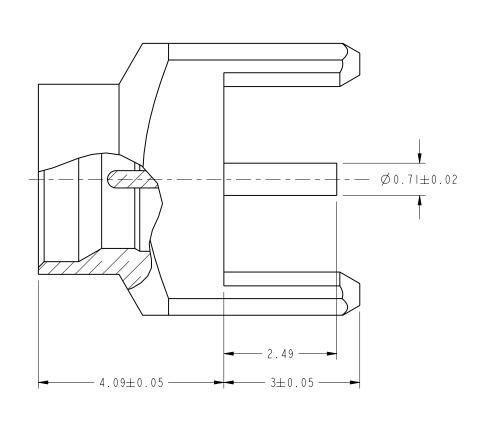

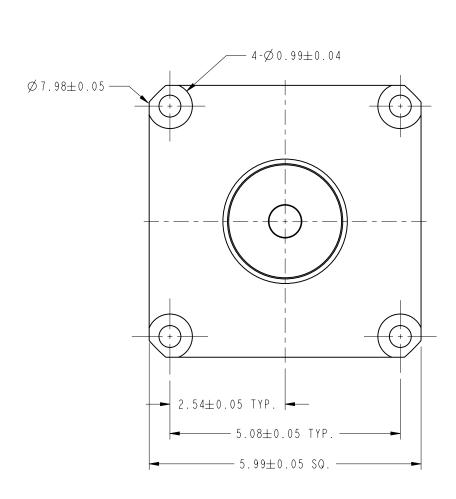

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

<0.5mm 0.5		5 - 30mm	30 - 120mm	ANGLES
± 0.05mm ±	0.lmm	±0.2mm	\pm 0.3mm	±1°
NOTICE - These drawin	ngs, specificatio	ns, or other de	ata (I) are, and r	emain the
property of Amphenol				
confidential and not				
are given by Ampheno				
other data by Ampheno				
not to be regarded by				
rights to permitting				
product, process or a	design, patented	or otherwsie,	that may in any wo	ıy be related to
or disclosed by said	drawings, specif	ications, or o	ther data.	

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE:

MATERIAL	DRAWN J.CHENG	DATE 01-Jun-10	TITLE SMP JACK PIN CO	γ NTACT
	ENGINEER S.HSIEH	DATE 9/21/04	PCB RECEPTACI	
REFERENCE FAR # 1531 AND 615X-1732	APPROVED	DATE	CATCHERS M	ΙŢ
	S.HSIEH	0 - Jun - 0	SCALE: 2.0: .0 SHEET 2	OF 2
ONFIGURATION LEVEL: Released	CAD FILE		DWG SIZE	REV
FINISH	I:\SMP\SMP-MSLD-PCT		В	В

Amphenol RF Danbury CT USA, Tainan, Taiwan, Shenzhen www.amphenolrf.com	
DRAWING NO.	SMP-MSLD-PCT
ITEM NO.	SMP-MSLD-PCT
PART NO.	SMP-MSLD-PCT