

Description: 2.4GHz SMT PIFA Antenna

**PART NUMBER: W3613** 

**Series: Embedded Antenna** 





Frequency: 2.4-2.5GHz

· Gain: 4dBi


Size: 14.2 x 13.3 x 3.2 mm

SMT compatible

Packing: Tape&Reel

· RoHS compliant





Tablets, Notebooks

IoT and M2M devices

Portable Electronics

Security, Transportation



All dimensions are in mm / inches

Issue: 1719

In the effort to improve our products, we reserve the right to make changes judged to be necessary. CONFIDENTIAL AND PROPRIETARY INFORMATION

This document contains confidential and proprietary information of Pulse Electronics, Inc. (Pulse) and is protected by copyright, trade secret and other state and federal laws. Its receipt or possession does not convey any rights to reproduce, disclose its contents, or to manufacture, use or sell anything it may describe. Reproduction, disclosure or use without specific written authorization of Pulse is strictly forbidden. For more information:



Description: 2.4GHz SMT PIFA Antenna

**PART NUMBER: W3613** 

**Series: Embedded Antenna** 

## **ELECTRICAL SPECIFICATIONS**

Frequency 2.4-2.5GHz

Nominal Impedance  $50\Omega$ 

VSWR 2:1

Peak Gain 4dBi +/- 1 dB

Radiation Pattern Omni

Polarization: Linear

Power withstanding 5W



Description: 2.4GHz SMT PIFA Antenna

**Series: Embedded Antenna** 

Plastic frame

Color

**PART NUMBER: W3613** 

MECHANICAL SPECIFICATIONS		
LCP		
Gray		

Weight 1 g

Size(LXWXT) 14.2(0.56)X13.3(0.52)X3.2(0.13) mm(inch)

Fixing system SMT

## **ENVIRONMENTAL SPECIFICATIONS**

Operating temperature

-40/+85

° C




Description: 2.4GHz SMT PIFA Antenna

**PART NUMBER: W3613** 

Series: Embedded Antenna

## **MECHANICAL DRAWING**

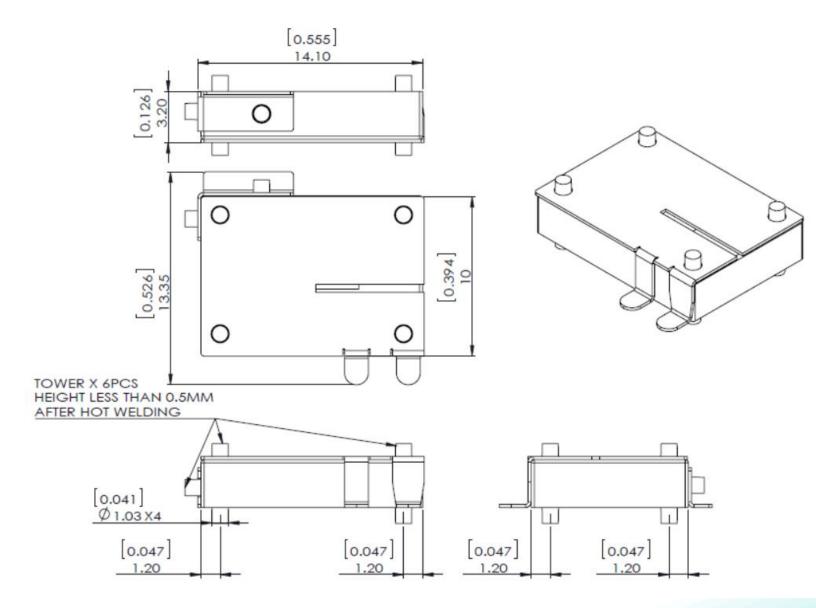



Description: 2.4GHz SMT PIFA Antenna


PART NUMBER: W3613

**Series: Embedded Antenna** 


## **OTHER SPECIFICATIONS**

# **PCB LAYOUT:**

# 1, PCB material, FR4, size, 80X50X0.8mm

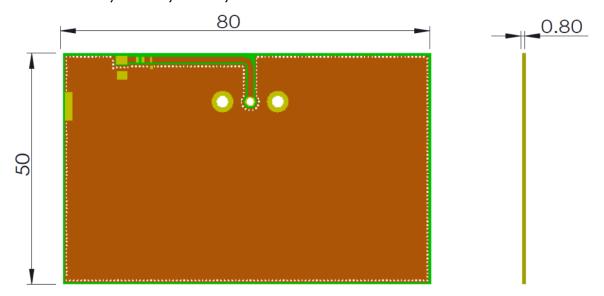

# 2, Clearance area (Top)

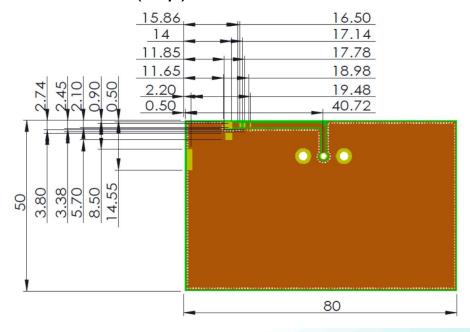

Issue: 1719






Description: 2.4GHz SMT PIFA Antenna

**PART NUMBER: W3613** 


**Series: Embedded Antenna** 

## **OTHER SPECIFICATIONS**

# 3, Clearance area (Bottom)

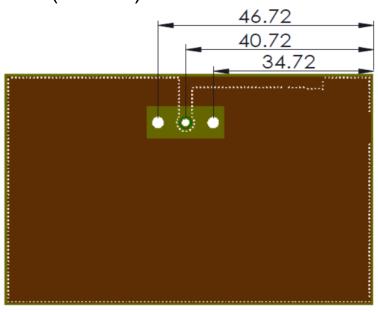

# 4, PCB Features

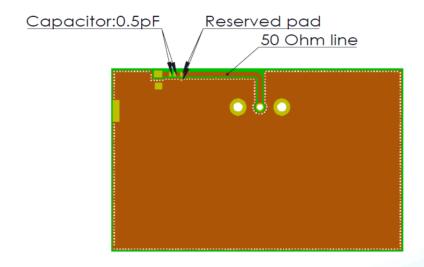




Description: 2.4GHz SMT PIFA Antenna


**PART NUMBER: W3613** 

**Series: Embedded Antenna** 

## **OTHER SPECIFICATIONS**

# 5, Antenna on test board

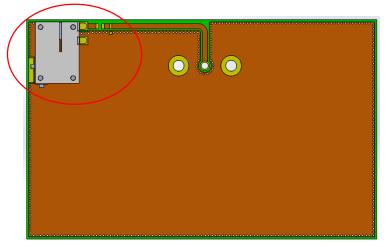

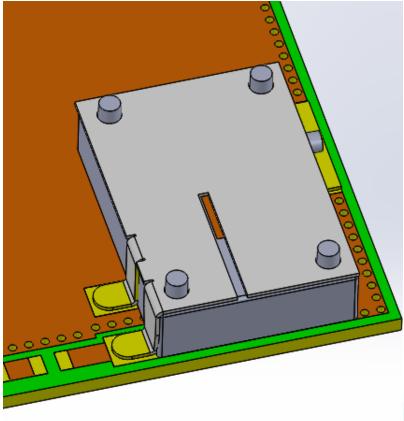





Description: 2.4GHz SMT PIFA Antenna

**PART NUMBER: W3613** 

**Series: Embedded Antenna** 

#### **OTHER SPECIFICATIONS**

# Recommendation for reflow soldering process

Printing stencil thickness 0,15 - 0,25 mm is recommended for the solder paste. The maximum soldering temperature should not exceed 260°C. The temperature profile recommendations for reflow soldering process is presented in the Figures 1 and 2. The reflow profile presented in figure 1 describes minimum reflow temperatures. The reflow profile presented in figure 2 describes maximum reflow temperatures. located at the center of the coverage area.

	Method of heat transfer	Controlled hot air convection
1	Average temperature gradient in preheating	2.5 °C/s
2	Soak time	2-3 minutes
3	Max temperature gradient in reflow	3 °C/s
4	Time above 217 °C	Max 30 sec
5	Peak temperature in reflow	230 °C for 10 seconds
6	Temperature gradient in cooling	Max -5 °C/s

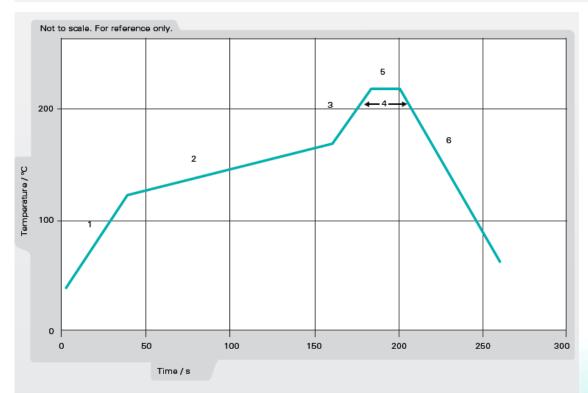


Figure 1. Minimum temperature profile recommendation for reflow soldering process





Description: 2.4GHz SMT PIFA Antenna

**PART NUMBER: W3613** 

## **Series: Embedded Antenna**

## **OTHER SPECIFICATIONS**

П		Method of heat transfer	Controlled hot air convection
1	1	Average temperature gradient in preheating	2.5 °C/s
2	2	Soak time	2-3 minutes
3	3	Max temperature gradient in reflow	3 °C/s
4	1	Time above 217 °C	Max 60 sec
5	5	Time above 230 °C	Max 50 sec
6	6	Time above 250 °C	Max 10 sec
7	7	Peak temperature in reflow	260 °C for 5 seconds
8	3	Temperature gradient in cooling	Max -5 °C/s

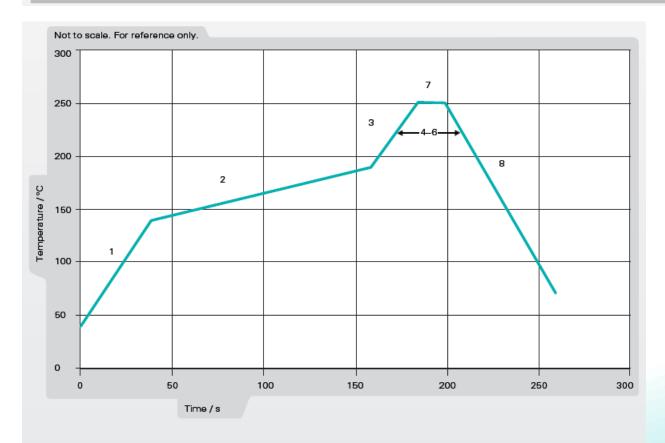



Figure 2. Maximum temperature profile recommendation for reflow soldering process



Description: 2.4GHz SMT PIFA Antenna

PART NUMBER: W3613

**Series: Embedded Antenna** 

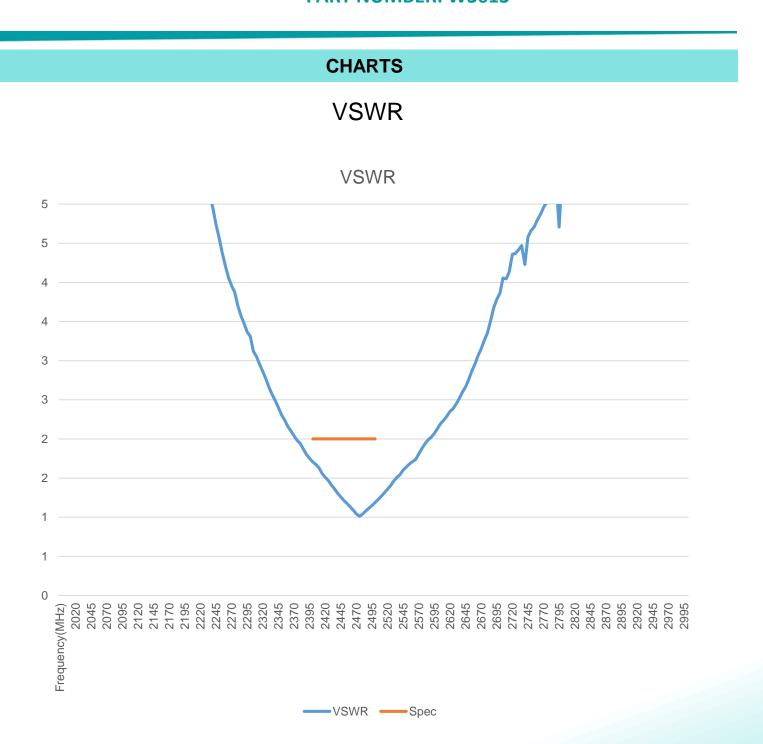








Description: 2.4GHz SMT PIFA Antenna

PART NUMBER: W3613

Series: Embedded Antenna

### **CHARTS**

# Efficiency(%)

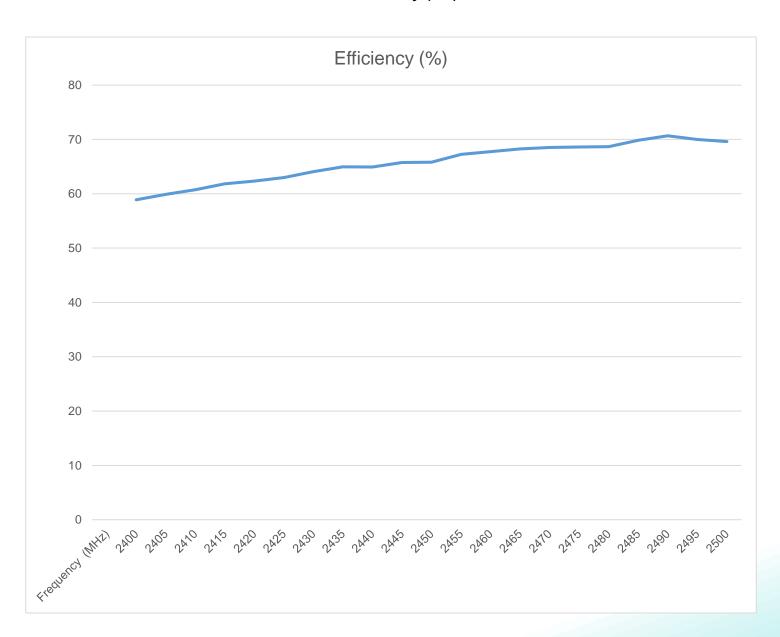



Description: 2.4GHz SMT PIFA Antenna

PART NUMBER: W3613

## Series: Embedded Antenna

#### **CHARTS**

# Peak Gain (dBi)







Description: 2.4GHz SMT PIFA Antenna

**PART NUMBER: W3613** 

## **Series: Embedded Antenna**

## **CHARTS**

# Free Space Radiation Pattern

# Elevation Plane Ayr (Bill) = 1.355 Ayr (Bill) = 1.



Description: 2.4GHz SMT PIFA Antenna

**PART NUMBER: W3613** 

# Series: Embedded Antenna

## **PACKAGING**

Tray packing 500PCS/Tray 1000PCS/ Carton box



