


GAGE DIMENSIONS APPLY WHEN TOOL IS
BOTTOMED BUT NOT UNDER PRESSURE.

FOR REPLACEMENT OF PARTS OTHER THAN
LISTED, TOOL SHOULD BE RETURNED TO OUR
FACTORY TO INSURE PROPER CERTI-CRIMP
ADJUSTMENT.

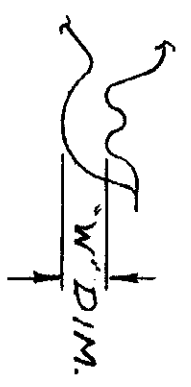

"W" DIM.	NO. 60
.054	.060

REV	DESCRIPTION	BY	CHK	DATE
F	REVISED	BS.		7/16/64
E	REVISED	RWS	CM	4-18-65
D	REVISED	CH	CM	3-27
C	REVISED	BY	CM	5-26-62

NUMBER 49975

DESCRIPTION	REQUIRED PER ASSEMBLY
49975	

QTY	DWG SIZE	NUMBER	NAME	REMARKS	REV NO
2	A	21045-6	RING - RETAINING		6
1	A	300449	PIN - RETAINING		5
1	A	39364	SPRING		4
1	A	39366	COLLAR		3
2	A	300432	PIN - RETAINING		2
4	A	21045-3	RING - RETAINING		1

DR. J. J. [Signature]	14-23-63
CHK. [Signature]	6-13-62
APP. [Signature]	6-13-62

MATERIAL AND FINISH		CLASS		CUSTOMER COPY REFERENCE ONLY	
WIRE - RANGE - INSULATION	16-14	TYPE	W" FLAG	AMP INCORPORATED	HARRISBURG, PENNA.
TOLERANCE EXCEPT AS NOTED = 1/16"	1/16"	LOC	M	NO	49975
SCALE		REV		F	
HAND TOOL ASSEMBLY					

8 7 6 5 4 3 2 1

A

B

C

D