


1. Wiring Diagram.

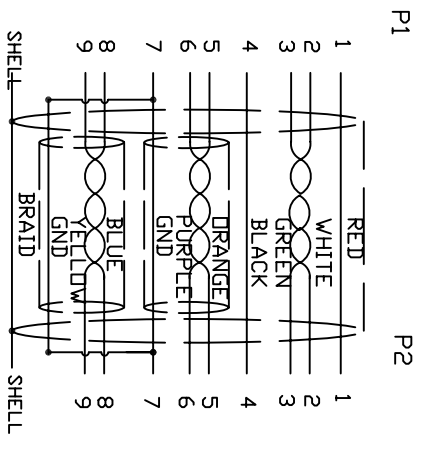

2. Cable test condition :
 Open / Short : 100%
 Insulation resistance : 5M ohms
 Contact resistance : 2 ohm
 Hipot : DC 300V / 1 sec
 3. Each pcs with PE polybag.

6	CORE	RH14.2*28.5*6.35mm	2		
5	CONN	USB3.0 B MAILE G/F BLUE	1	P2	
4	PVC	45P PVC BLACK OVERMOLD	25g		
3	PE	LLDPE 500026 6201	1kg		
2	CONN	USB3.0 A/M G/F BLUE	1	P1	
1	CABLE	《28AWG (7/0.12TC) *1P+D(7/0.10TC)+AL+M》*2+28AWG (7/0.12TC) *1P+24AWG(7/0.21TC)*2C+A+D+B (96/0.12AM) OD5.5 BLACK	1	2000mm	
NO.	PART NO.	DESCRIPTION		QTY	UNIT/REF
		BILL OF MATERIAL			

A	INITIAL RELEASE	2014/08/28
REV#	DESCRIPTION	DATE
WENC	103-1030-BL-F0200	REV A
EDWIN	CABLE USB3.0 AM TO B/M WITH FERRITES 2M	REV A
DATE	CUSTOMER P/N:	
08/24/14		
CHECKED	CUSTOMER:	
EDWIN		
APPROVAL	SHEET 1 OF 1	