NOTES: I. MATERIALS AND FINISHES: BODY - BRASS, SILVER PLATING CONTACT - BERYLLIUM COPPER, SILVER PLATING INSULATOR - PTFE 2. ELECTRICAL: A. IMPEDANCE: 50 OHM B. DIELECTRIC WITHSTANDING VOLTAGE: 500 VRMS, MIN. 3. MECHANICAL:


A. DURABILITY: 500 CYCLES MIN. B. TEMPERATURE RANGE: -65° C TO +165° C

4. PACKAGING:

A. QUANTITY: SINGLE PACK B. MARKING: BAG TO BE MARKED


"AMPHENOL RF, 31-3220, AND DATE CODE"


5. MAX. PANEL THICKNESS=6.98mm

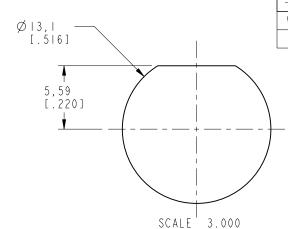

THIRD ANGLE PROJ. 🕀 🖯


DIMENSIONS




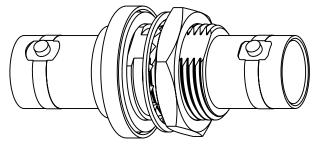

SCALE 2.000

RECOMMENDED MOUNTING HOLE

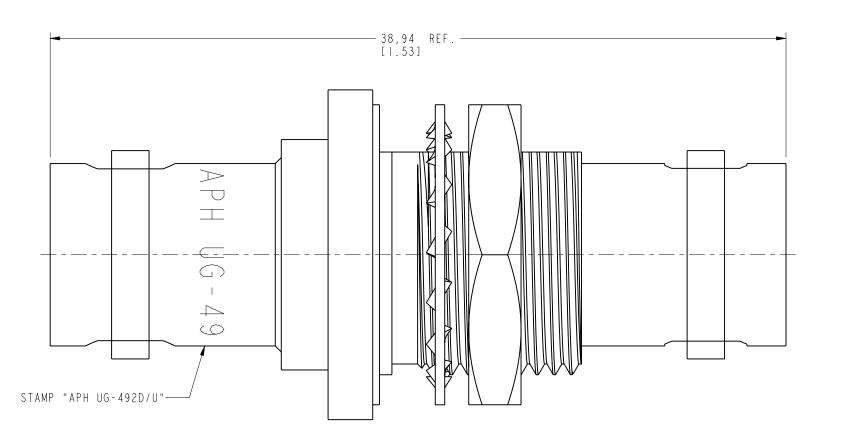

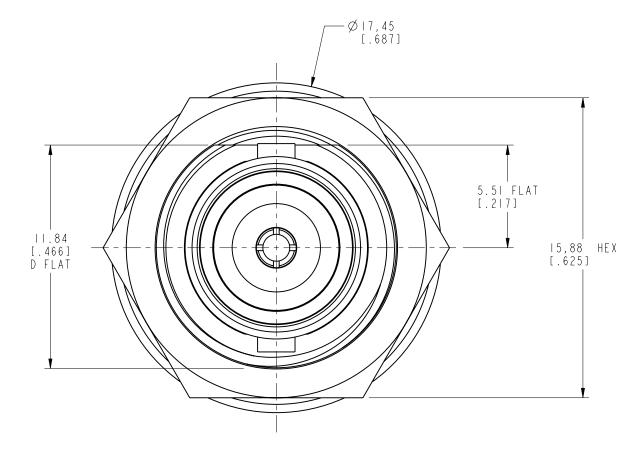

CUSTOMER OUTLINE DRAWING

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN METRIC AND TOLERANCES ARE: <0.5mm 0.5 - 6mm 6 - 30mm 30 - 120mm ANGLES
\pm 0.05mm \pm 0.1mm \pm 0.2mm \pm 0.3mm \pm 1°
OTICE - These drawings, specifications, or other data (I) are, and remain the
roperty of Amphenol corp. (2) must be returned upon request; and (3) are
onfidential and not to be disclosed to any person other than those to whom they re given by Amphenol Corp. the furnishing of these drawings, specifications, or
ther data by Amphenol Corp., or to any other person to anyone for any purpose is
ot to be regarded by implication or otherwise in any manner licensing, granting
ights to permitting such holder or any other person to manufacture, use or sell any
roduct, process or design, patented or otherwise, that may in any way be related to
r disclosed by said drawings, specifications, or other data.

MATERIAL	DRAWN R.MAO	DATE 31-May-11	Т
	ENGINEER D ROYCE	DATE 01-Jul-09	
REFERENCE EAR # AND	APPROVED S.HSIEH	DATE 31-May-11	S
CONFIGURATION LEVEL:	CAD FILE		

TITLE			
BNC AD	APTOR		
PRESSU	RIZED		
UG-492	D/U		Ī
SCALE: 5.0:1.0	SHEET 2	OF 2	ŀ
DWG SIZE	-	REV	L
		\/	

Amphenol RF				
www.amphenolrf.com				
DRAWING NO.	31-3220			
ITEM NO.	31-3220			
PART NO.	31-3220			