
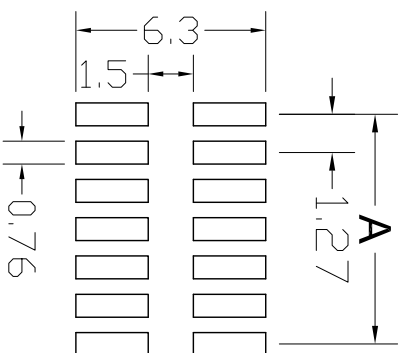
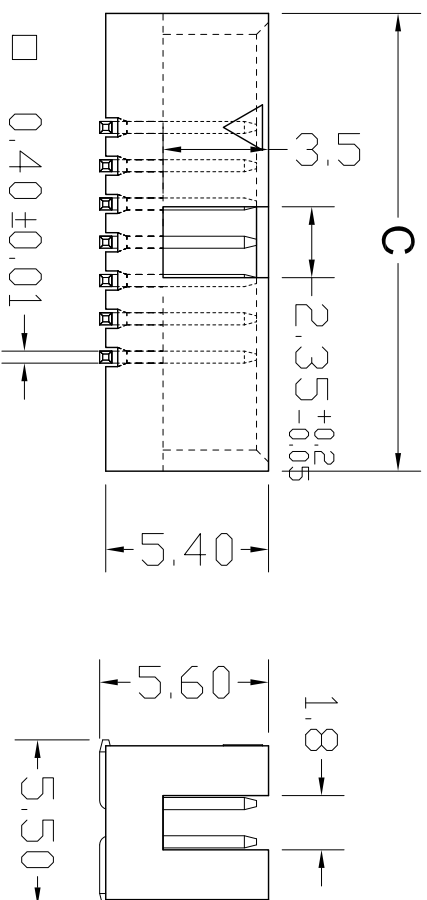


# RoHS

REV.	DESCRIPTION	DATE
A	RELEASE	2014.05.21

NOTES:  
 Insulator Material: Nylon-6T, UL 94V-0  
 Contact Plating: Flash Gold  
 Contact Material: Brass

Current Rating : 1A AC,DC  
 Contact Resistance: 20MΩ Max.  
 Dielectric Withstanding: AC 500V  
 Insulator Resistance: 1000MΩ Min.  
 Operating Temp.: -40°C~+105°C

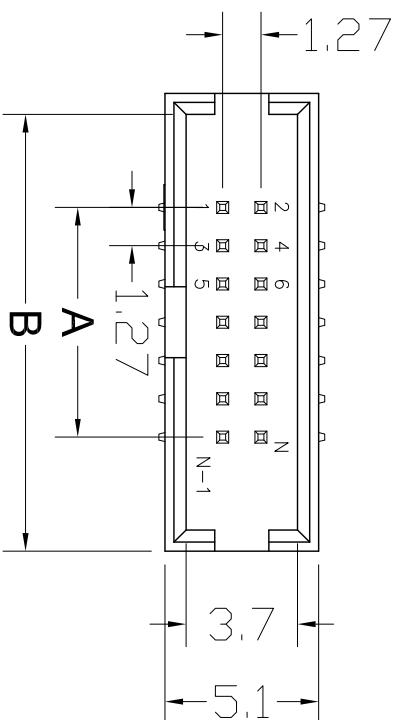


NUMBER OF POSITIONS	DIMENSIONS		
	A	B	C
10	5.08	11.25	12.65
14	7.62	13.79	15.19
16	8.89	15.06	16.46
20	11.43	17.60	19.00
26	15.24	21.41	22.81
30	17.78	23.95	25.35
34	20.32	26.49	27.89
40	24.13	30.30	31.70
50	30.48	36.65	38.05
60	36.83	43.00	44.40

**CnC Tech,LLC**

Port NO.:  
3221-XX-0300-00


UNLESS TOLERANCE		DRAW BY
GENERAL	ANGLE	DESIGN BY
X. ± 0.30	X.° ± 3.0°	CHECK BY
.X ± 0.25	.X° ± 2.0°	APPROVE BY
.XX ± 0.20	.XX° ± 1.0°	SCALE
.XXX ± 0.10	.XXX ± 0.5°	SHEET
		UNIT
		MM




SCALE 1:1  
 SHEET 1/1  
 UNIT MM

Draw NO.:  
REV: A

**MATING PART**  
3230-XX-0103-00



**MATING PART**  
3230-XX-0104-00



A

B

C

D

A

B

C

D

1 2 3 4 5 6