


REVISIONS			
P	LR	DESCRIPTION	DATE
B	REV: 40033535MCO		28SEP2016
			CG
			TE

- 1 MAXIMUM INSERTION LOSS IS 0.5 DB PLUS CABLE ATTENUATION OF 0.7dB/km AT 1310nm. (SEE TABLE)
- 2. MINIMUM RETURN LOSS: 55 DB

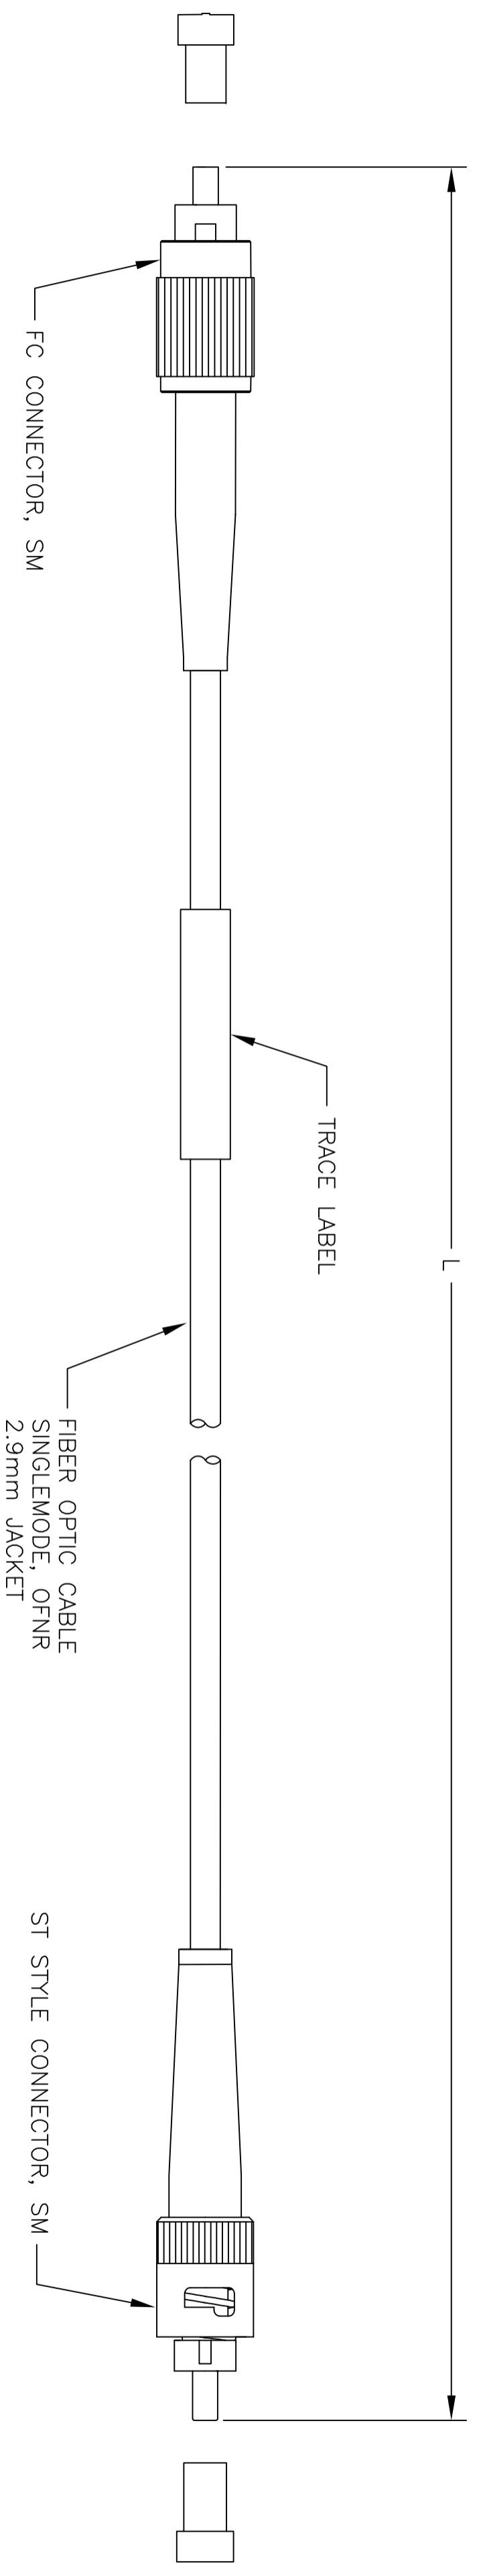

0.50	4.00±0.08	[157.5±3.0]	1-5492018-2
0.50	6.00±0.08	[236.2±3.0]	1-5492018-1
0.50	8.00±0.15	[315.0±5.9]	1-5492018-0
0.52	30.00±0.30	[1181.1±11.8]	5492018-9
0.52	25.00±0.30	[984.2±11.8]	5492018-8
0.51	20.00±0.30	[787.4±11.8]	5492018-7
0.51	15.00±0.15	[591.6±5.9]	5492018-6
0.51	10.00±0.15	[393.7±5.9]	5492018-5
0.50	5.00±0.08	[196.8±3.2]	5492018-4
0.50	3.00±0.05	[118.1±2.0]	5492018-3
0.50	2.00±0.05	[78.7±2.0]	5492018-2
0.50	1.00±0.05	[39.4±2.0]	5492018-1
MAX IL (DB)	L METERS [INCHES]		PART NUMBER

5492018

THIS DRAWING IS A CONTROLLED DOCUMENT.

DMN	W. DAVIS	25OCT05
CHK	J. DUNCAN	25OCT05
APP'D	F. MCCORKEL	25OCT05

NAME: CABLE ASSEMBLY, FIBER OPTIC, SINGLEMODE, 2.9mm OFNR CABLE, FC TO ST STYLE, ROHS

SIZE: A2 CASE CODE: 00779 DRAWING NO: 5492018

SCALE: NTS SHEET: 1 OF 1 REV: B

CUSTOMER DRAWING

A

B

C

D

A

B

C

D