
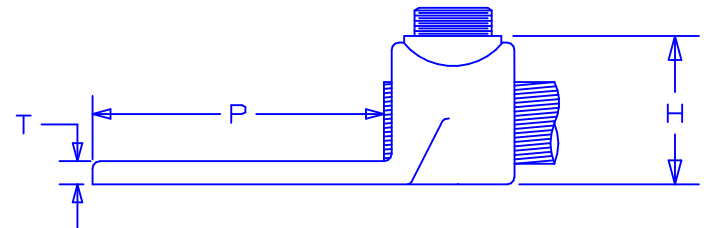


PART NUMBER	COPPER CONDUCTOR SIZE RANGE	STUD HOLE SIZE (IN.)	STUD HOLE SPACING (IN.)	HEX KEY SIZE (IN.)	FIGURE DIMENSIONS (IN.)					TIGHTENING TORQUE (IN.-LBS.)	STD. PKG. QTY.
					L	W	H	T	P		
H2L4-2N-X	#8 SOL- #4 STR	1/2	1.75	***	3.75	1.25	.76	.19	3.00	35	10
H2L8-2N-2	#4 SOL- #1 STR	1/2	1.75	7/16	3.94	1.38	.92	.22	3.00	100	2
H2L13-2N-2	#1 SOL- 2/0 STR	1/2	1.75	9/16	4.00	1.63	1.06	.22	3.00	250	2
H2L21-2N-2	2/0 STR- 4/0 STR	1/2	1.75	9/16	4.19	1.88	1.34	.31	3.00	250	2
H2L30-2N-1	4/0 STR- 300 kcmil	1/2	1.75	5/8	4.38	2.00	1.45	.31	3.00	350	1

NOTES:

1. ALLOWS FOR TERMINATION OF TWO COPPER CONDUCTORS.
2. CAST FROM HIGH STRENGTH CORROSION RESISTANT COPPER ALLOY TO PROVIDE PREMIUM ELECTRICAL AND MECHANICAL PERFORMANCE.
3. WIRE RANGE-TAKING CAPABILITY MINIMIZES INVENTORY REQUIREMENTS.
4. INTERNAL PRESSURE PLATE PROVIDES UNIFORM CLAMPING FORCE ON CONDCUTOR FOR PREMIUM ELECTRICAL PERFORMANCE.
5. INTERNAL BARREL SERRATIONS PROVIDE PREMIUM WIRE PULL-OUT STRENGTH.
6. INSPECTION WINDOW TO VISUALLY ASSURE FULL CONDUCTOR INSERTION.
7. FLAT BOTTOM ALLOWS FOR COMPLETE CONTACT WITH MOUNTING SURFACE.
8. UL LISTED FOR USE UP TO 600V AND TEMPERATURE RATED 90° C.

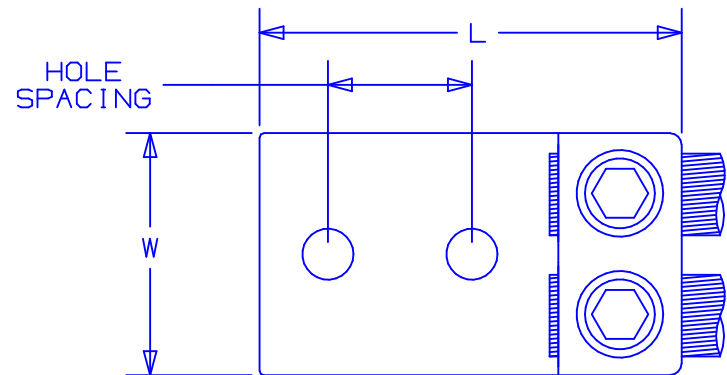

C41436_00

00	9/04	KF		RELEASED			
----	------	----	--	----------	--	--	--

PANDUIT

CORP.

TINLEY PARK, ILLINOIS

TWO-HOLE, STRAIGHT TONGUE,
TWO BARREL LUG
H2L-2N FAMILY

REV	DATE	BY	CHK	DESCRIPTION	ECN #	PM	CUST	DRAWN BY	CHK'D	SCALE	DRAWING NO.
								KLFU		NONE	C41436