


NYL CRIMP

MATERIAL: Copper
 PLATING: Electro-Tin (.0003 Min.)
 INSULATION: Nylon, Color Coded Yellow
 STUD SIZES: "D" \pm .005

Optional Configuration*

SD026

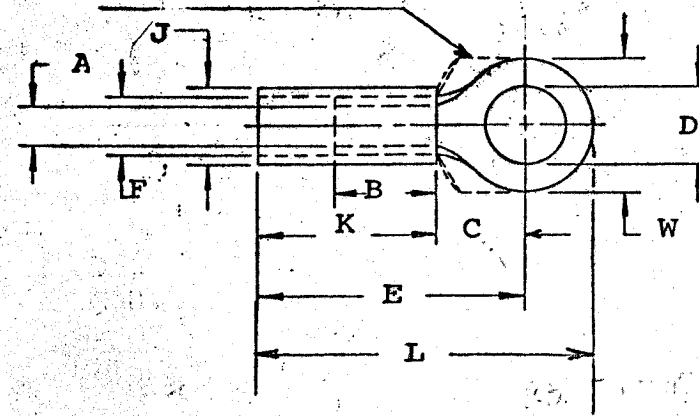

- 14 - .265"
- 56 - .328"
- 38 - .390"
- 76 - .453"
- 12 - .515"

Part Number	"W"	"C" Min.	"E" Max.	"K" Max.	"L" Max.	"A" Min.Avg.	"F" (MWID)	Stock Thickness	"J" Max.	"B" Min.	Available Stud Size
*J-785	.941 .915	.760	2.215	1.590	2.665	.500	.675	.083	.828	.685	14, 56, 38, 76, 12
*J-786	.923 .897	.760	2.215	1.590	2.604	.500	.675	.083	.828	.685	14, 56, 38, 76, 12
J-787	1.260 1.235	1.280	2.343	1.590	3.335	.500	.675	.083	.828	.685	12, 58, 34, 78

NOTE: (MWID) denotes maximum wire insulation diameter.



TITLE: CUSTOMER DRAWING
 2/0 WIRE RANGE (J)
 RING
 TONGUE TERMINAL

DIMENSIONAL TOLERANCE UNLESS OTHERWISE SPECIFIED

FRAC.	DEC.	ANG.
\pm	\pm	\pm

REVISION	SCALE: _____	DATE
	DRWN. BY: JTK	1-21-70
	CHKD. BY:	
	APPRD. BY:	
	DRAWING NO.:	