FLYBACK TRANSFORMER FOR LT®1171TM






- Designed for use with Linear Technology's LT®1171™ in power supplies for Subscriber Line Interface Circuits
- Turns ratio 1:1:1:1 with low leakage inductance
 Performance verified by Linear Technology
 Corporation

Electrical Specifications @ 25°C — Operating Temperature -30°C to +130°C								
Part Number	Turns Ratio	Primary Inductance (µH)	Leakage Inductance (µH)	DCR (mΩ)	Hipot (VRMS)			
PE-68488	1:1:1:1	36 ± 25%	0.30 MAX	(See schematic and note 1)	(See note 2)			

Mechanical

Schematic

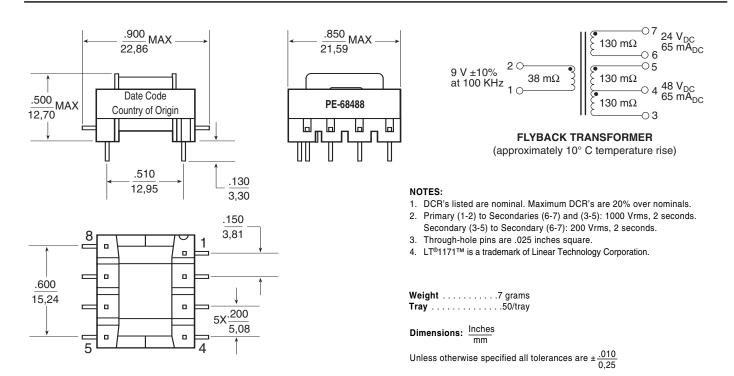

For More Information:

UNITED STATES	UNITED KINGDOM	FRANCE	SINGAPORE	TAIWAN, R.O.C.	HONG KONG	DISTRIBUTOR		
(Worldwide)	(Northern Europe)	(Southern Europe)	(Southern Asia)	(Northern Asia)	(China/Hong Kong)			
12220 World Trade Drive	1 & 2 Huxley Road	Zone Industrielle	150 Kampong Ampat	3F-4, No. 81, Sec. 1	9/F, Phase 2, Tai Sang			
San Diego, CA 92128	The Surrey Research Park	F-39270	#07-01/02	HsinTai Wu Road	Shatin Warehouse Centre			
U.S.A.	Guildford, Surrey GU2 5RE	Orgelet	KA Centre	Hsi-Chih, Taipei Hsien	6 Wong Chuk Yeung Street			
http://www.pulseeng.com	United Kingdom	France	Singapore 368324	Taiwan, R.O.C.	Fotan, Shatin, Hong Kong			
TEL: 858 674 8100	TEL: 44 1483 401700	TEL: 33 3 84 35 04 04	TEL: 65 6287 8998	Tel: 886 2 2698 0228	TEL: 852 2788 6588			
FAX: 858 674 8262	FAX: 44 1483 401701	FAX: 33 3 84 25 46 41	FAX: 65 6280 0080	FAX: 886 2 2698 0948	FAX: 852 2776 1055			
Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product								

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners.