


MODEL: BU-P72981

**SMB Plug Crimp Installation** 

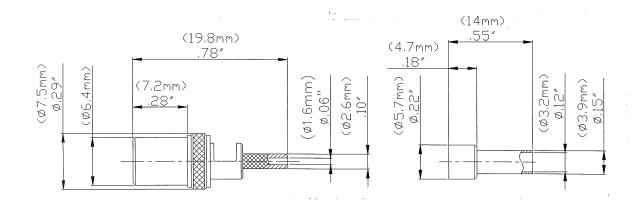

Can be used with RG174, 188, 316

## **MATERIALS:**

Body - Gold Plated Brass

Contacts – Gold plated Beryllium Copper

Insulator – PTFE

## **RATING:**

Voltage: Hands free testing to 250VRMS Max.

Temperature: -50°C to 170°C

Frequency: 0 to 3 GHz Impedance: 50 Ohms