
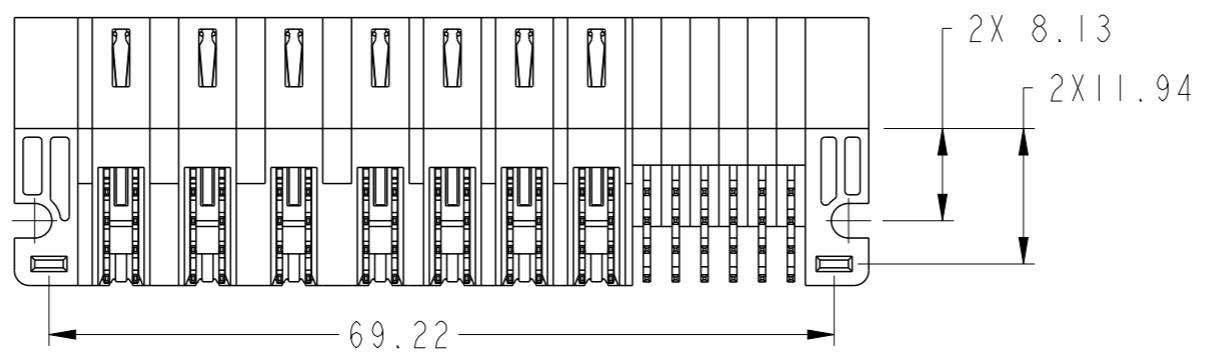
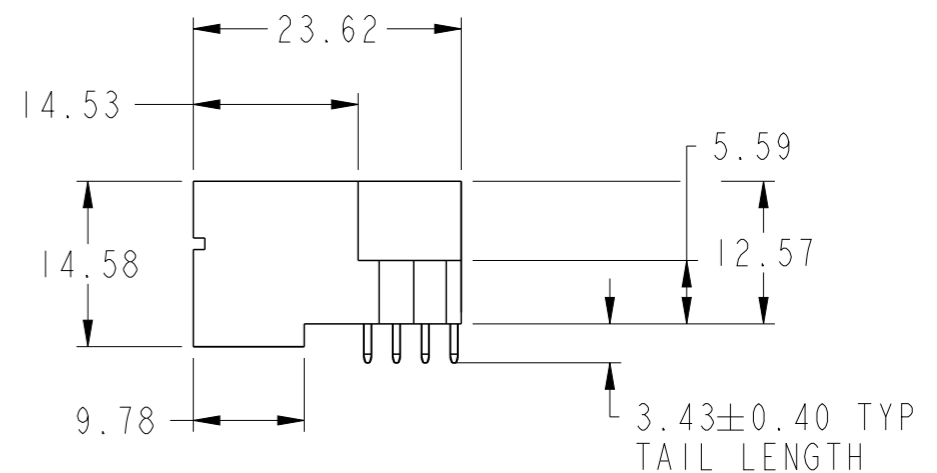
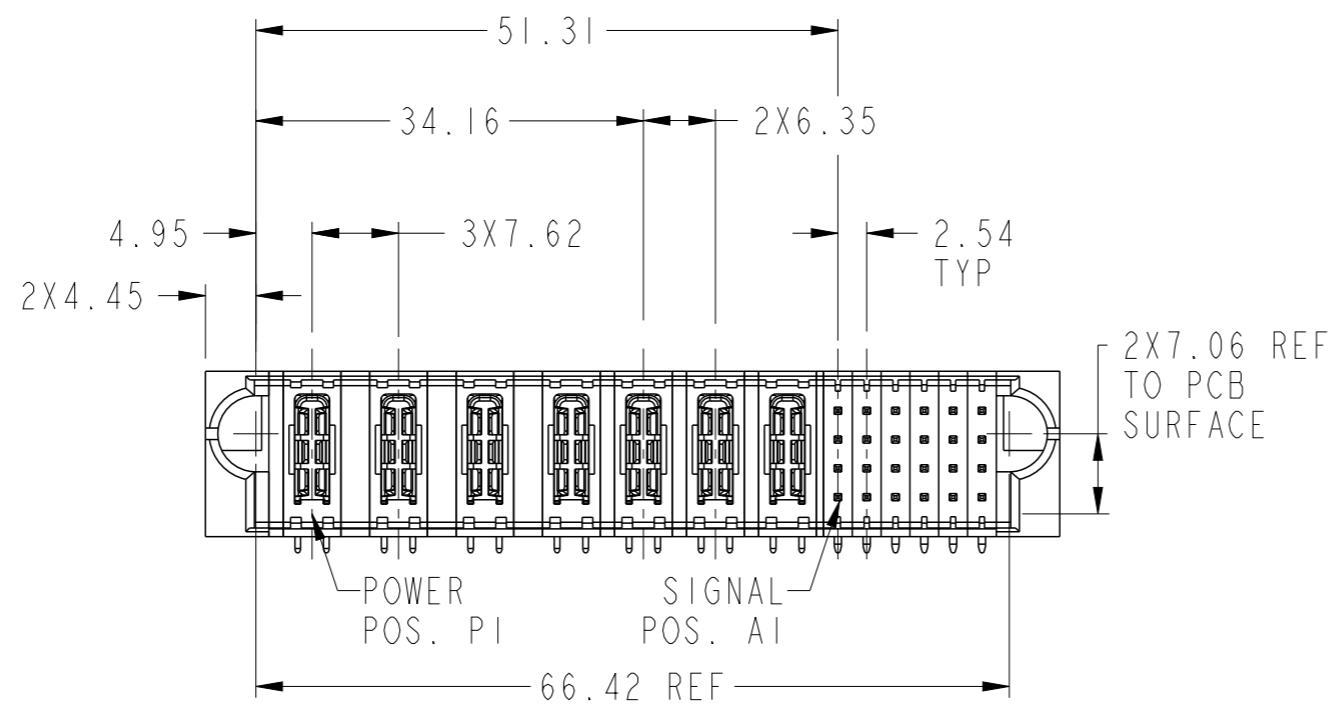



PRODUCT NUMBER SEE SHEET 2

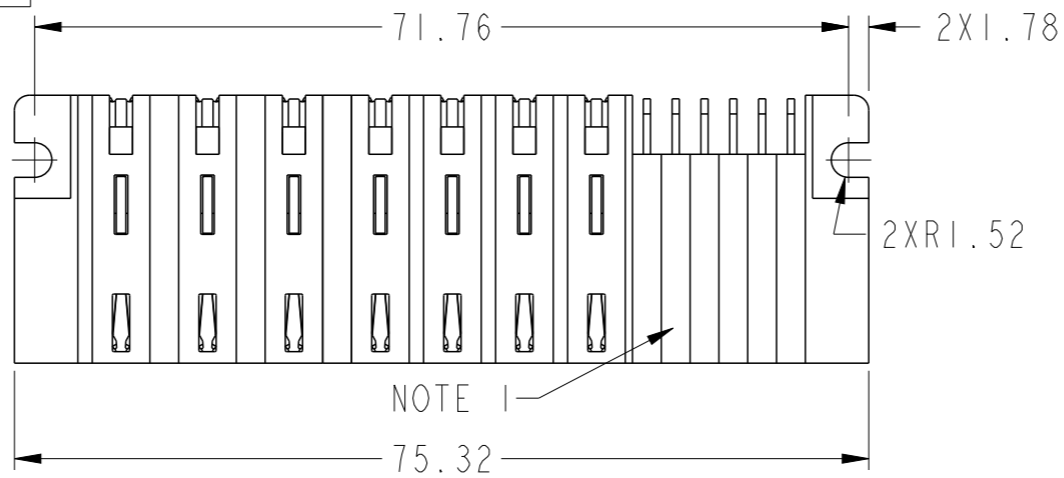

Copyright FCI.

spec ref	*	dr	Peng-Bing Fu	2013/03/19	projection	MM	size	A3	scale	3:2									
tolerance std	ASME Y14.5	eng	Peng-Bing Fu	2013/04/23			ecn no		-										
TOLERANCES UNLESS OTHERWISE SPECIFIED		chr	-	-			rel level		Released										
surface	<table border="1"> <tr> <td>linear</td> <td>0.X</td> <td>±0.5</td> </tr> <tr> <td></td> <td>0.XX</td> <td>±0.25</td> </tr> <tr> <td></td> <td>0.XXX</td> <td>±0.10</td> </tr> </table>	linear	0.X	±0.5		0.XX	±0.25		0.XXX	±0.10	appr	Pei-Ming Zheng	2013/04/23	product family	PwrBlade+	dwg no	10106262-7006001	rev	A
linear	0.X	±0.5																	
	0.XX	±0.25																	
	0.XXX	±0.10																	
ASME Y14.5	<table border="1"> <tr> <td>angular</td> <td>0°</td> <td>±2°</td> </tr> </table>	angular	0°	±2°	www.fci.com		cat. no.	Product - Customer Drw		sheet 1 of 3									
angular	0°	±2°																	

PRODUCT NO.	ROWS	HIGH POWER							HP			SIGNAL						E2
		E1	P1	P2	P3	P4	P5	P6	P7	1	2	3	4	5	6			
10106262-7006001LF	DCBA	H1	H1	H1	H1	H1	H1	H1	H	H	U	U	U	H				
		T	G	G	G	T	G		S	F	F	F	S	F				
		R	E	R	R	E	E											

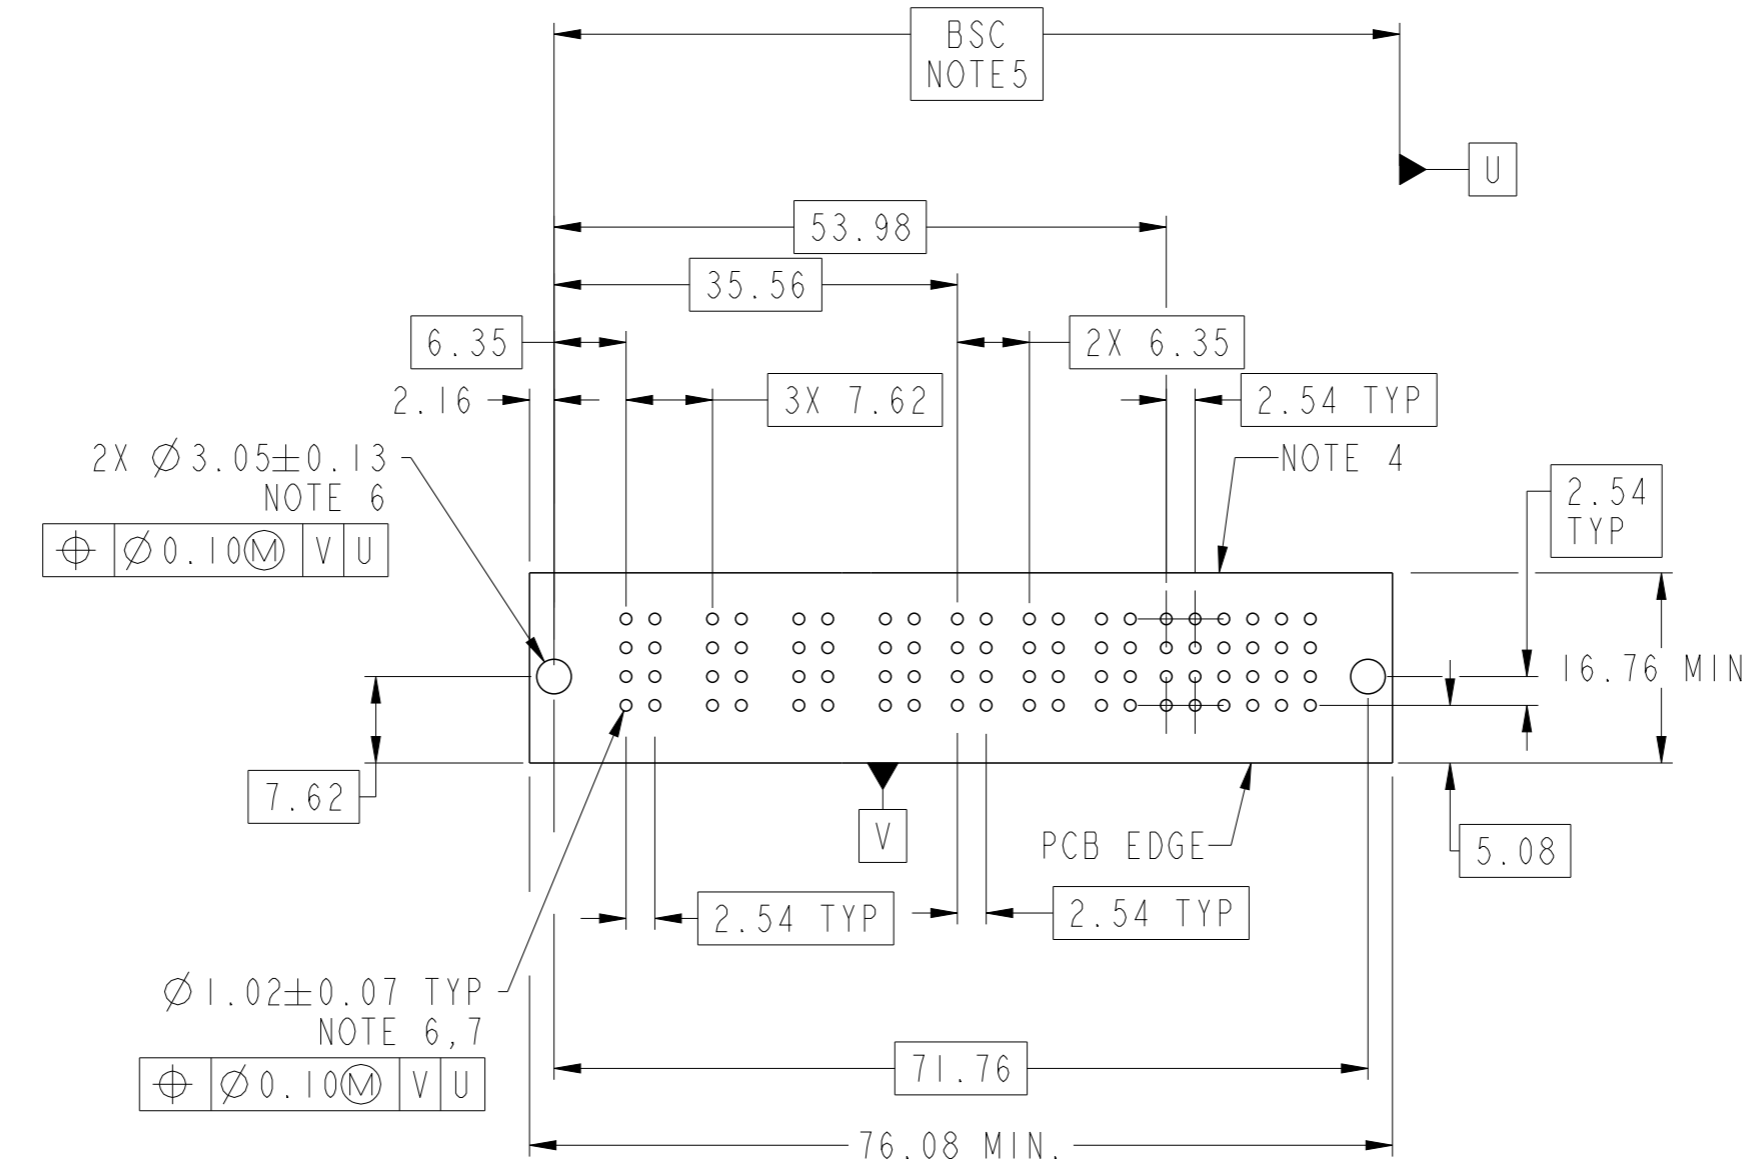

CODE	DESCRIPTION
E	MLBF SIGNAL CONTACT, ROW A (3.43)
F	MLBF SIGNAL CONTACT, ROW B (3.43)
G	MLBF SIGNAL CONTACT, ROW C (3.43)
H	MLBF SIGNAL CONTACT, ROW D (3.43)
HI	STD HIGH POWER CONTACT (3.43)
R	STD SIGNAL CONTACT, ROW A (3.43)
S	STD SIGNAL CONTACT, ROW B (3.43)
T	STD SIGNAL CONTACT, ROW C (3.43)
U	STD SIGNAL CONTACT, ROW D (3.43)

dr	Peng-Bing Fu	2013/03/19	projection	MM	size	A3	scale	3:2
eng	Peng-Bing Fu	2013/04/23			ecn no		-	
chr	-	-			rel level		Released	
appr	Pei-Ming Zheng	2013/04/23	product family		PwrBlade+			
			title 3ACP+4H +24S RA STB HEADER			dwg no 10106262-7006001		rev A
www.fci.com			cat. no.		Product - Customer Drw			sheet 2 of 3






Copyright FCI.

NOTES:

- 1) "FCI", PART NUMBER AND DATE CODE TO BE MARKED ON THIS SURFACE.  
THE MARK CAN BE OMITTED IF THERE IS NOT ENOUGH SPACE ON THIS SURFACE.
- 2) MATERIALS:  
-HOUSING - GLASS FILLED WITH HIGH TEMP THERMOPLASTIC, UL94V-0.  
-SIGNAL CONTACT - COPPER ALLOY.  
-POWER CONTACT - HIGH CONDUCTIVITY COPPER ALLOY.
- 3) PLATING SPECIFICATION REFER TO FCI 10116351
- 4) DENOTES CONNECTOR KEEP OUT ZONE.
- 5) DATUM AND BASIC DIMENIONS WERE ESTABLISHED BY CUSTOMER.
- 6) ALL HOLE DIAMETERS ARE FINISHED HOLE SIZES.
- 7)  $1.15 \pm 0.025$ MM DRILLED HOLE PLATED WITH 0.00762MM MIN Sn  
OVER 0.0254-0.0762MM Cu PLATING TO ACHIEVE A  $1.02 \pm 0.07$ MM HOLE.
- 8) PRODUCT SPECIFICATION REFER TO FCI GS-12-658.  
APPLICATION SPECIFICATION REFER TO FCI GS-20-141.  
PRODUCT PACKAGED IN TRAYS, REFER TO FCI GS-14-1502.



Copyright FCI.

dr	Peng-Bing Fu	2013/03/19	projection 	MM 	size	A3	scale	3:2
eng	Peng-Bing Fu	2013/04/23			ecn no	-		
chr	-	-			rel level	Released		
appr	Pei-Ming Zheng	2013/04/23	product family	PwrBlade+				
		title 3ACP+4H +24S RA STB HEADER		dwg no 10106262-7006001	rev A			
www.fci.com		cat. no.	Product - Customer Drw		sheet 3 of 3			