

CUSTOMER P/N	FCI P/N	L/mm	L1/mm
08-0204-01-01	10125715-P0013YYLF	127±4	20REF


A

B

C

D

P2

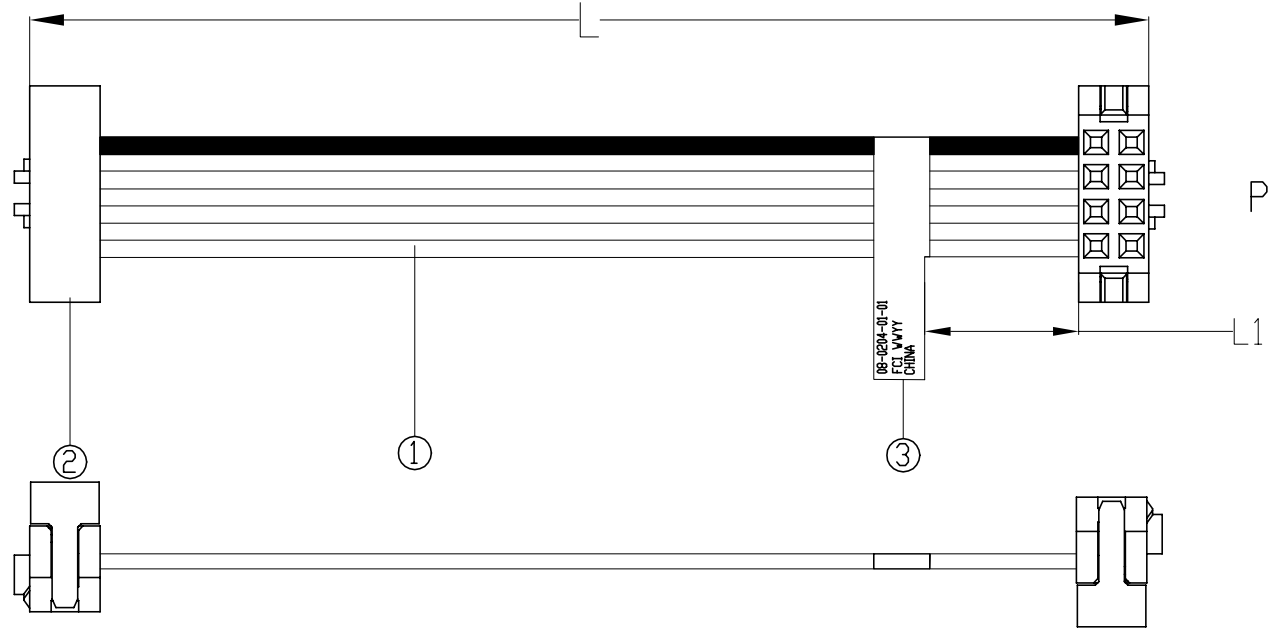


NOTES:

1. TEST:

□/S:100% TEST.
 CONNECTION RESISTANCE: 2 Ω MAX.
 HI-PDT:300V/10mS.
 INSULATION RESISTANCE: 10M Ω MIN.

2. PART NUMBER SCHEME FOR CABLE ASSEMBLY:

10125715 -P XXXX Y Y LF

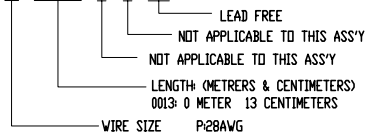

3. ROHS COMPLIANCE

4. LABEL CONTENT:

08-0204-01-01-----CUSTOMER P/N
 FCI WYYY-----DATE CODE (WEEK & YEAR)
 CHINA

08-0204-01-01
 FCI WYYY
 CHINA

Fold Perforation

No.	DESCRIPTION	QTY	UNIT
③	Lable	1	EA
②	Minithek 2x4 position IDC receptacle, 0.2um gold, with central key and friction latch bump	2	PC
①	Flat cable UL21682, 28AWG*8C, Pitch1.0, Halogen Free Polyolefin 3M P/NHF625/08	A/R	M

www.fciconnect.com		surface	-	tolerance std	-	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED				mm	
Dr	Harry Shi	2013-07-03	ANGULAR	0.X	±-	size	Scale
Eng	Harry Shi	2013-07-03	LINEAR	0.XX	±-	A3	n/a
Chr	Harry Shi	2013-07-03	0° ±-	0.XXX	±-	ECN	
Appr	Jackson Wang	2013-07-03	Product family		Spec ref		
FCI		title		Minithek IDC Cable Ass'y		dwg no	10125715
catalog no		-		CUSTOMER		sheet 1 of 1	

rev	ecn no	dr	date
A	-	SHH	2013-07-03
G	-	-	-

REV F - 2006-04-17

1

2

3

PDS: Rev :A

STATUS:Released

Printed: Jul 24, 2013

A

B

C

D

4



Copyright FCI.