



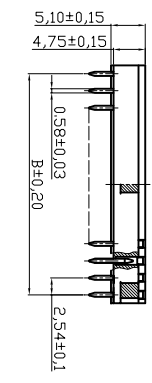








| | | | | | | |
|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
|---|---|---|---|---|---|---|

A **A XX-LC-TT** **A XX-LC/7-T**

CKT: 06, 08, 14, 16, 18, 20 CKT: 24, 28, 32, 40 CKT: 24, 28

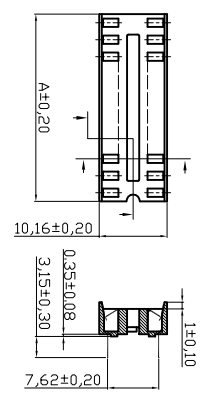

MATERIAL:

Contact : Phosphor- Bronze thickness 0.15mm
 Plating : Contact Plating, Tin plated 60u"~80u"
 (Lead free plating)
 Insulator : PBT-4830 , UL 94V-0

SPECIFICATIONS:

Current Rating : 1A
 Dielectric withstanding Voltage : 1000V RMS/minute
 Insulator resistance : 5000 Megohms min.
 Contact resistance : 20 milliohms initial
 30 milliohms after test.
 Operating temperatures : -55°c to 85°c
 Insertion force : 340g(12 oz) max.per contact.
 Withdrawal force : 80g(2.82 oz) min.per contact
 Soldering temperature: +245° C , 5S max.

| | | |
|-----|--------|--------|
| CKT | A±0.20 | B±0.20 |
| 06 | 7.62 | 5.08 |
| 08 | 10.16 | 7.62 |
| 14 | 17.78 | 15.24 |
| 16 | 20.32 | 17.78 |
| 18 | 22.86 | 20.32 |
| 20 | 25.40 | 22.86 |

| | | |
|-----|--------|--------|
| CKT | A±0.20 | B±0.20 |
| 24 | 30.48 | 27.94 |
| 28 | 35.56 | 33.02 |
| 32 | 40.64 | 38.10 |
| 40 | 50.80 | 48.26 |

| | | |
|-----|--------|--------|
| CKT | A±0.20 | B±0.20 |
| 24 | 30.48 | 27.94 |
| 28 | 35.56 | 33.02 |

RoHS compliant
Unit: mm

| Scale | Free | | | | | | |
|------------------|------|-----|---------------------------|------------|---------|----------|------------|
| TOLERANCE | | | | | | | |
| X. | ±X | ④ | Add soldering temperature | 24.02.2017 | Amy | Drawn | 24.03.1999 |
| X.X | ±X | ③ | Correct dimensions | 05.11.2009 | Dean | Approved | 24.02.2017 |
| X.XX | ±X | ② | Update | 21.07.2009 | Dean | | |
| DIM | TOL | ① | Drawn | 24.03.1999 | Hellwig | | |
| X.° | ±X° | | | | | | |
| X.X° | ±X° | | | | | | |
| Angle | TOL | Id. | Modification | Date | Name | | |



| | | | | | |
|-----------------|--------------|------|------------|------|---------|
| Customer-No. | | Date | 24.03.1999 | Name | Hellwig |
| ASSMANN WSW-No. | A XX-LC-TT | | | | |
| | A XX-LC/7-T | | | | |
| Drawing-No. | ASS 0810 CO | | | | |
| Replace | ASS 0333A CO | | | | |
| | ASS 0333B CO | | | | |
| | rev04 | | | | |
| | Sheet | | | | |

| | | | | | | |
|---|---|---|---|---|---|---|
| 1 | 2 | 3 | 4 | 5 | 6 | 7 |
|---|---|---|---|---|---|---|

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| H | G | F | E | D | C | B | A |
|---|---|---|---|---|---|---|---|