

COIL: 26.5 VDC

WINDING #1

1000 OHMS ± 10% @ 25° C

13.0 VDC MUST OPERATE

26.5 VDC NOMINAL VOLTAGE

WINDING #2

1000 OHMS ± 10% @ 25° C

13.0 VDC MUST OPERATE

26.5 VDC NOMINAL VOLTAGE

ENVIRONMENT:

VIBRATION 10 CPS TO 2500 CPS @ 30 g's


SHOCK 100 g's 6 MS. DURATION

TEMPERATURE -65 °C TO +125 °C

NOTES: OTHER SPECIFICATIONS IN ACCORDANCE WITH MIL-R-39016/45

CUSTOMER DATA SHEET

LAST ENERG. →

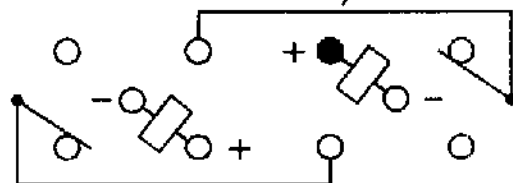

CONTACT RATING: 2 AMPS 28 VDC  
RESISTIVE 100,000 OPERATIONS

DR. R.B. 12/21/94 CK. 12095 JMB

**COMMUNICATIONS INSTRUMENTS, INC.**

CUST. COMMERCIAL  
CUST. NO. M39016/45-020L

TYPE "LS" RELAY

LS-9520L