


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

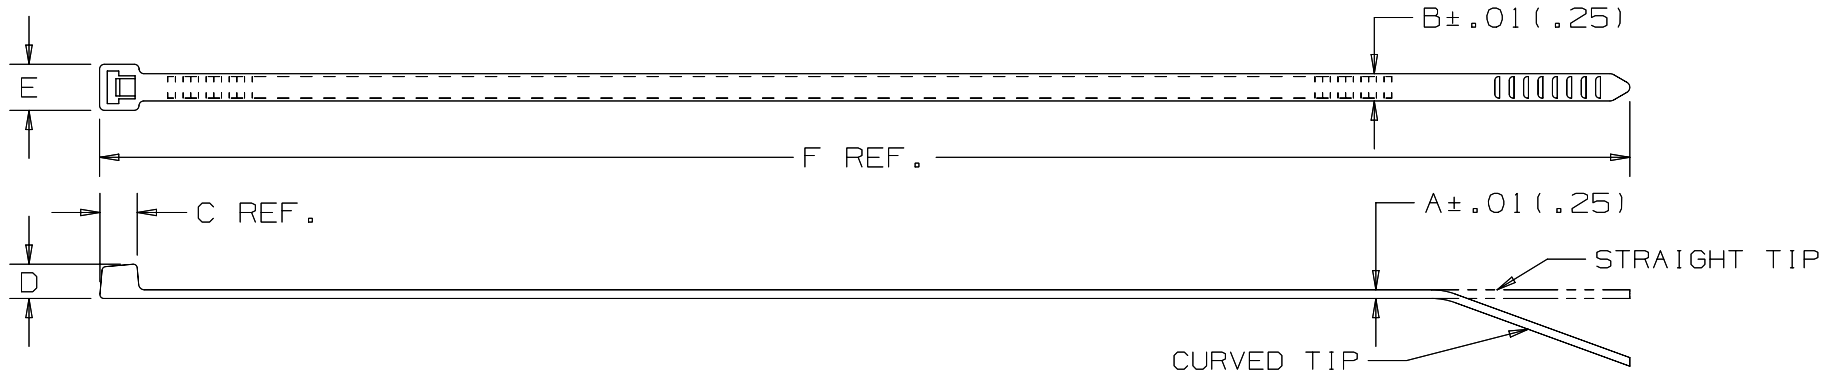

| PANDUIT PART NO. * | BUNDLE DIA. | | A in (mm) | B in (mm) | C in (mm) | D in (mm) | E in (mm) | F in (mm) | MIN. LOOP TENSILE lbs. ** (N) | CROSS SECTION | TIP STYLE | WEIGHT lbs./100 pcs. (g) |
|--------------------|--------------|--------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------------------|---------------|-----------|--------------------------|
| | MIN. in (mm) | MAX. in (mm) | | | | | | | | | | |
| PLT1M-86 | .13 (3.3) | .87 (22) | .044 (1.1) | .098 (2.5) | .159 (4.0) | .186 (4.7) | .188 (4.8) | 3.9 (100) | 18 (80) | MINIATURE | CURVED | .07 (34) |
| PLT2I-86 | .13 (3.3) | 2.00 (51) | .047 (1.2) | .135 (3.4) | .200 (5.1) | .180 (4.6) | .240 (6.1) | 8.0 (203) | 30 (134) | INTERMEDIATE | CURVED | .21 (96) |
| PLT2S-86 | .13 (3.3) | 1.85 (47) | .057 (1.4) | .190 (4.8) | .260 (6.6) | .240 (6.1) | .320 (8.1) | 7.30 (186) | 50 (222) | STANDARD | CURVED | .35 (157) |
| PLT3S-86 | .13 (3.3) | 3.00 (76) | .057 (1.4) | .190 (4.8) | .260 (6.6) | .240 (6.1) | .320 (8.1) | 11.50 (291) | 50 (222) | STANDARD | CURVED | .56 (252) |
| PLT4S-86 | .13 (3.3) | 4.00 (102) | .057 (1.4) | .190 (4.8) | .260 (6.6) | .240 (6.1) | .320 (8.1) | 14.40 (366) | 50 (222) | STANDARD | CURVED | .71 (324) |
| PLT3H-86 | .25 (6.4) | 3.00 (76) | .075 (1.9) | .300 (7.6) | .370 (9.4) | .360 (9.1) | .480 (12.2) | 11.10 (282) | 120 (534) | LIGHT-HEAVY | STRAIGHT | 1.15 (522) |
| PLT4H-86 | .25 (6.4) | 4.00 (102) | .075 (1.9) | .300 (7.6) | .370 (9.4) | .360 (9.1) | .480 (12.2) | 14.40 (366) | 120 (534) | LIGHT-HEAVY | STRAIGHT | 1.42 (643) |

NOTES:

*1) SEE www.panduit.com FOR PART NUMBER SUFFIX DESIGNATION FOR PACKAGE SIZE, PART MATERIAL, PART COLOR AND ANY THIRD PARTY RECOGNITION OR COMPLIANCE.

2) COMPOSED OF METAL DETECTABLE NYLON.

3) MATERIAL FLAMMABILITY: CONFORMS TO UL94V-HB.

**4) CONDITIONED FOR 24 HRS @ 120° F/20% RH.

DIMENSIONS IN PARENTHESES ARE IN METRIC UNITS

| | | | | | | | | | | | | |
|-----|---------|-----|-----|------|---|--|-----------------|-----------------|------------|---------------|------------|-----------|
| | | | | | | TITLE PAN-TY CABLE TIES - PLT METAL DETECTABLE SERIES | | | | | | |
| | | | | | | CONTROL DRAWING | | | | | | |
| | | | | | | ITEM REVISION NAME W10001BF/03 | | | | | | |
| | | | | | | DATASET FILE NAME W10001BF/03-SS-27556 | | | | | | |
| | | | | | | UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .x ± ---- .xxx ± .020 (.51) .xx ± .02 (.5) ANGLES ± ---- | | | | | | |
| | | | | | | MATERIAL: METAL DETECTABLE NYLON - COLOR: BLUE | | | | | | |
| | | | | | | DRAWING NUMBER: SS-27556 | | | | | | |
| 03 | 9/20/16 | BWG | MPH | JADE | UPDATED TITLE BORDER AND NOTE 1. SEE ECN DOCUMENT FOR COMPLETE DETAILS. | 010688/00 | | | | | | |
| REV | DATE | BY | CHK | APR | DESCRIPTION | ECN | DRAWN BY ERW | DATE 5/29/07 | CHK TGS | SCALE NONE | SHT 1 OF 1 | SIZE A |

D10100DA/20