



UNIT:mm

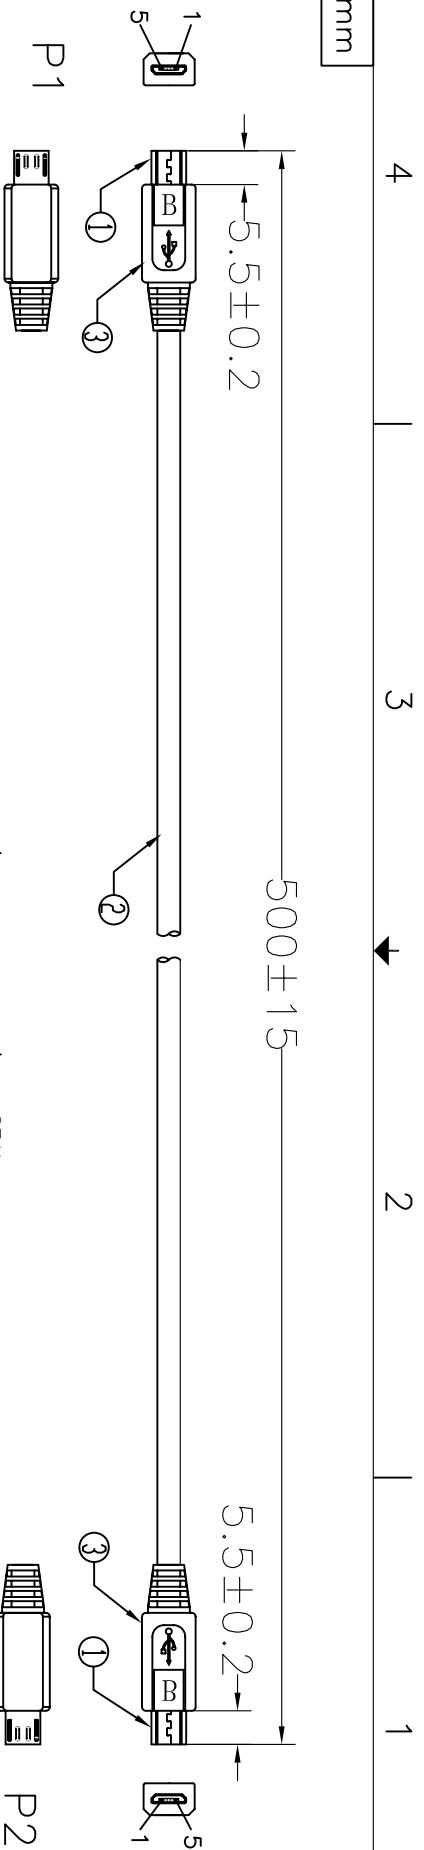

PIN ASSIGNMENT	
P1	P2
1 RED	1
2 WHITE	2
3 GREEN	3
4 BLACK	4
5 DRAIN+BRAID	5
SHELL	SHELL

**Electrical test:**  
 1. 100% short, open, miswire test  
 2. Conduct resistance: 2 Ohm(max)  
 3. Insulation resistance: 10Mohm(min)  
 4. dielectric test: DC 300V

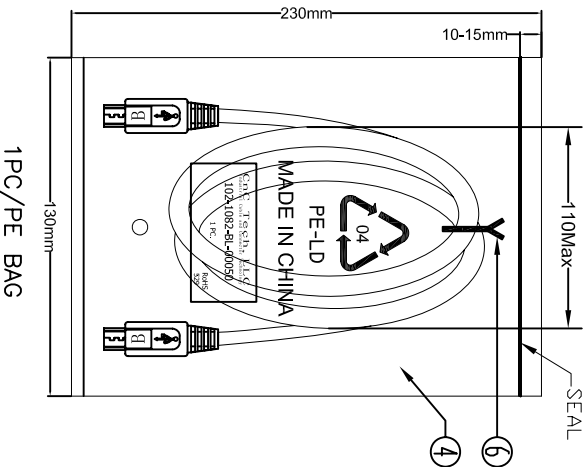

NO.	TIE	Q'TY	NAME	SPECIFICATION
⑥	TIE	1	BLACK	L=60mm
⑤	PE BAG	1/10	CLEAR SIZE: 280*330*0.05mm	PRINT BLACK*MADE IN CHINA*+''10PCS''及印生产周期,有透气孔.
④	PE BAG	1	CLEAR SIZE: 130*230*0.05mm	PRINT BLACK*MADE IN CHINA*+''1PC''及印生产周期,有透气孔.
③	OUT JACKET	12g	BLACK PVC-40P	(MOULD NO:MM-116)
②	CABLE	1	USB2.0 UL2725	[28AWG(7/0.12TC+AL)*1P+28AWG(7/0.12TC)*2C]+AEB(48B TC) JACKET:BLACK OD:3.5mm L=490±5mm
①	CONN	2	MICRO USB 5P B/M	SOLDER TYPE SHELL:NICKEL PIN:G/F INSULATOR COLOR:BLACK

**CNC Tech, LLC**  
 Industrial Cable and Connector Technology

DRAWN	ZHONGHS	DRAWING NO	
CHECKED		CUSTOMER	
APPROVAL		ITEM NO.	102-1082-BL-00050
DECIDED		DATE	2012-02-16
VERSIONS/EDITION	A/0	PROJECTION	

A

B

C

D

A

B

C

D