

AR8035


Ultra low-power single RGMII
Gigabit Ethernet PHY



Solution Highlights

- General purpose PHY targeting computing, home networking, consumer electronics and infrastructure
- Atheros ETHOS-Designed Green Ethernet (EDGE™) power-saving technologies
- Integrated MDI termination resistors
- Power saving based on cable length and link status
- RGMII MAC interface
- Full IEEE 802.3az support
- Atheros proprietary SmartEEE support
- Hardware Wake-on-LAN (WoL) Support
- Cable Diagnostics Technology (CDT) with
- Support up to 10K Bytes Jumbo Frame
- Single 3.3V supply
- Co-layout support with 802.3az 10/100M PHY-AR8030

AR8035 Architecture

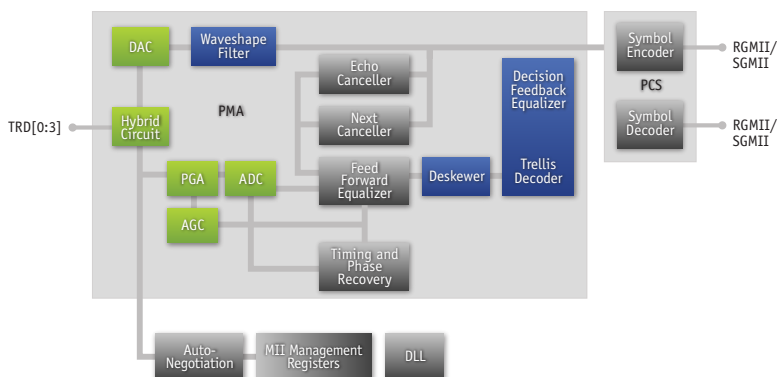

Technology Overview

Atheros ETHOS® technologies provide customers with industry-leading low power and solution size to enable Fast or Gigabit Ethernet connectivity in networking equipment, consumer electronics and computing platforms. Our PHY, controller and switch solutions support the IEEE 802.3az standard for Energy Efficient Ethernet, to extend battery-charges on computing platforms and deliver power-efficiencies in networking equipment. Atheros also enables incremental power-saving techniques to offer our customers the very lowest power Ethernet in the industry today. The unmatched efficiency and advanced carrier-class features of Atheros ETHOS solutions give customers a competitive edge when designing products for energy-conscious consumers and businesses.



AR8035 Product Overview

The AR8035 is part of the Arctic family of PHYs – which includes the AR8030, AR8031, and the AR8033. It is Atheros' 4th generation, single port 10/100/1000 Mbps tri-speed Ethernet PHY. It supports an RGMII interface to the MAC with wide RGMII I/O voltage support from 1.5V to 3.3V.

The AR8035 integrates Atheros latest ETHOS-Designed Green Ethernet (EDGE) power-saving technologies and significantly saves power in all operating and idle modes.

Atheros EDGE power-savings include ultra-low power in cable unplugged mode or port power-down mode, and automatic optimized power-saving based on cable length. The AR8035 supports the latest IEEE 802.3az-2010, Energy Efficient Ethernet (EEE) standard with proprietary SmartEEE technology to improve energy efficiency in systems using legacy MAC devices without 802.3az support – enabling customers to fully realize the energy benefits of the new standard by just replacing the PHY devices in their designs.

The AR8035 supports Wake-on-LAN (WoL), embeds CDT (cable diagnostics test) technology on-chip and integrates a voltage regulator on chip enabling it to operate from a single 3.3V supply. It reduces the termination R/C circuitry on both the MAC interface (RGMII) and line side. The AR8035 provides a low power, low BOM (bill-of-materials) solution for a wide range of applications – including consumer, enterprise, carrier and home network products such as set-top box, connected TV, printer, game console, xDSL/xPON CPE, telecom embedded system, voice and video phone, digital media player/eReader devices, and LAN-on-motherboard.

The AR8035 supports co-layout with the AR8030 Fast Ethernet PHY.

There is Here.™

AR8035

Ultra low-power single RGMII
Gigabit Ethernet PHY

AR8035 Specifications

10/100/1000Base-T IEEE 802.3 compliant

Supports 1000Base-T PCS and auto-negotiation with next page support

Supports RGMII interface to MAC devices with a broad I/O voltage level options including 3.3V, 2.5V, 1.8V and 1.5V.

RGMII timing modes support internal delay and external delay on both Rx and Tx paths

Error-free operation up to 140 meters of CAT5 cable

Atheros latest ETHOS-Designed Green Ethernet (EDGE) power-saving modes with internal automatic DSP power saving scheme

Supports 802.3az (Energy Efficient Ethernet) and Proprietary Smart EEE

Fully integrated digital adaptive equalizers, echo cancellers, and near end crosstalk (NEXT) cancellers

IEEE 802.3u compliant Auto-Negotiation

Software programmable LED modes

Multiple Loopback modes for diagnostics

Single power supply: 3.3V

Atheros Communications is a global leader in innovative technologies for wireless and wired communications. Atheros combines its wireless and networking systems expertise with high-performance radio frequency (RF), mixed signal and digital semiconductor design skills to provide highly integrated chipsets that are manufactured on low-cost, standard complementary metal-oxide semiconductor (CMOS) processes. Atheros technology is used by a broad base of leading customers, including networking equipment, computing and consumer device manufacturers.

For more information on the AR8035 or other solutions from Atheros contact your local representative:

Atheros Communications, Inc.
t +1 408.773.5200
f +1 408.773.9940

Atheros Hong Kong Limited
t +852 8206.1131
f +852 8206.1301

Atheros Communications KK-Japan
t +81 3.5501.4100
f +81 3.5501.4129

Atheros (Shanghai) Co., Ltd.
t +86 21.5108.3626
f +86 21.5027.0100

Atheros Communications Intl, LLC-Taiwan
t +886 2.8751.6385
f +886 2.8751.6397

Atheros Korea
t +82 31.786.0428

