

SUMMARY



Image is for illustrative purpose only

Wires

Low	19
High	0
Coax	0
Triax	0
Quad	0
Fiber	0
Fluidic	0

Download

[Request a quote](#)

[Catalog](#)

Series	C
Termination type	Male solder
IP rating	50
Cable Ø	3.20 - 5.20 mm
Matching parts	CKB.M19.GLLJ
Status	
Alternative part	

TECHNICAL DETAILS

Mechanics

Shell Style/Model	CA*: Straight plug with cable collet
Keying	2 keys (gamma=60; Plug: male contacts; Receptacle: female contacts)
Housing Material	PSU (Polysulfone), gray
Cable Fixing	C52: 3.2 - 5.2 mm
Variant	

Performance

Configuration	CAB.M19 : 19 Low V.
Insulator	
Rated Current	5 Amps

Specifications

Test voltage (kV rms) Contact-contact: 1.4
Air clearance min. (mm) or Creepage distance min. (mm): 0.6


Others

F ret (min): 150 N

F ret (max): 250 N
Steam sterilization: 20 times (with potting on rear connection)
IP Rating: 50

DRAWINGS

Draws

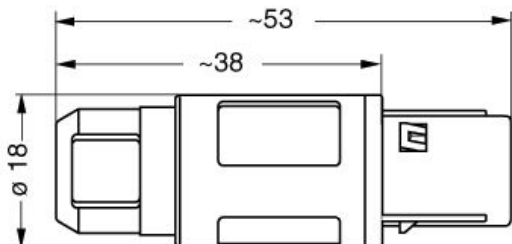

Dimensions

	A	L
mm.	18	53
in.	0,71	2,09

RECOMMENDED BY LEMO

Tools

None

Cables