

## SUMMARY

### # Wires

Low	0
High	0
Coax	1
Triax	0
Quad	0
Fiber	0
Fluidic	0



*Image is for illustrative purpose only*

### Download

[Request a quote](#)

[Catalog](#)

Series	00
Termination type	Male solder
IP rating	50
Cable Ø	1.80 - 2.20 mm
Matching parts	ERA.00.250.CTL
Status	
Alternative part	

## TECHNICAL DETAILS

### Mechanics

Shell Style/Model	FFE*: Straight plug with front sealing ring, cable collet
Keying	Circular (can rotate)
Housing Material	Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
Cable Fixing	C22: 1.8 - 2.2 mm
Variant	

### Performance

Configuration	0.25 : 1 Coax (50 Ohm)
Insulator	L: PEEK (UL 94 / V-0/3.2, depends on material thickness)
Rated Current	4 Amps

### Specifications

Contact Type:	Coaxial 50 Ohm (Solder)
Max. Matings:	5000
Contact Dia.:	0.7 mm (0.028in)
Bucket Dia.:	0.6 mm (0.024in)
Test voltage:	2.1 kV (rms)
R (max):	6.1 mOhm

Vtest: 2100 V (AC), 3000 V (DC)

□  
Impedance: 50 Ohm

VSWR:  $1.09 + 0.11 * f/\text{GHz}$

Cable type: RG 196 A/U - RG 178 B/U - LEMO Germany reference 178 190

## Others

Endurance (Shell): 5000 mating cycles


F ret (min): 100 N

IP Rating: 50

---

## DRAWINGS

### Draws

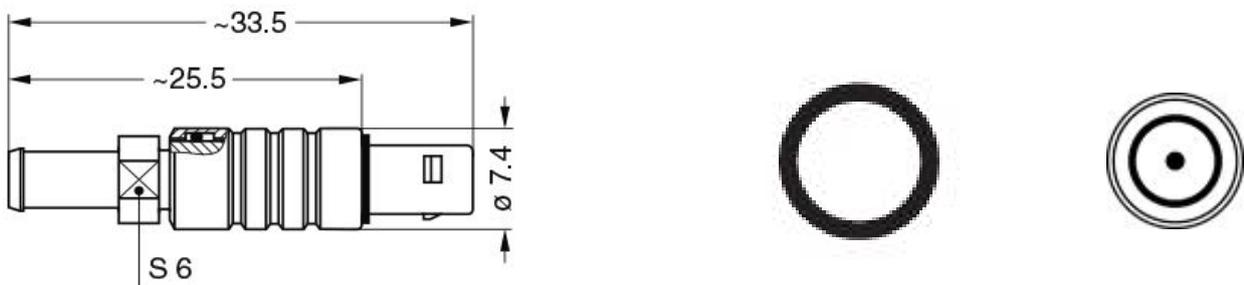

### Dimensions

	A	L	M
mm.	7.4	33.5	25.5
in.	0,29	1,32	1,00

---

## RECOMMENDED BY LEMO

### Tools

None

### Cables