


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

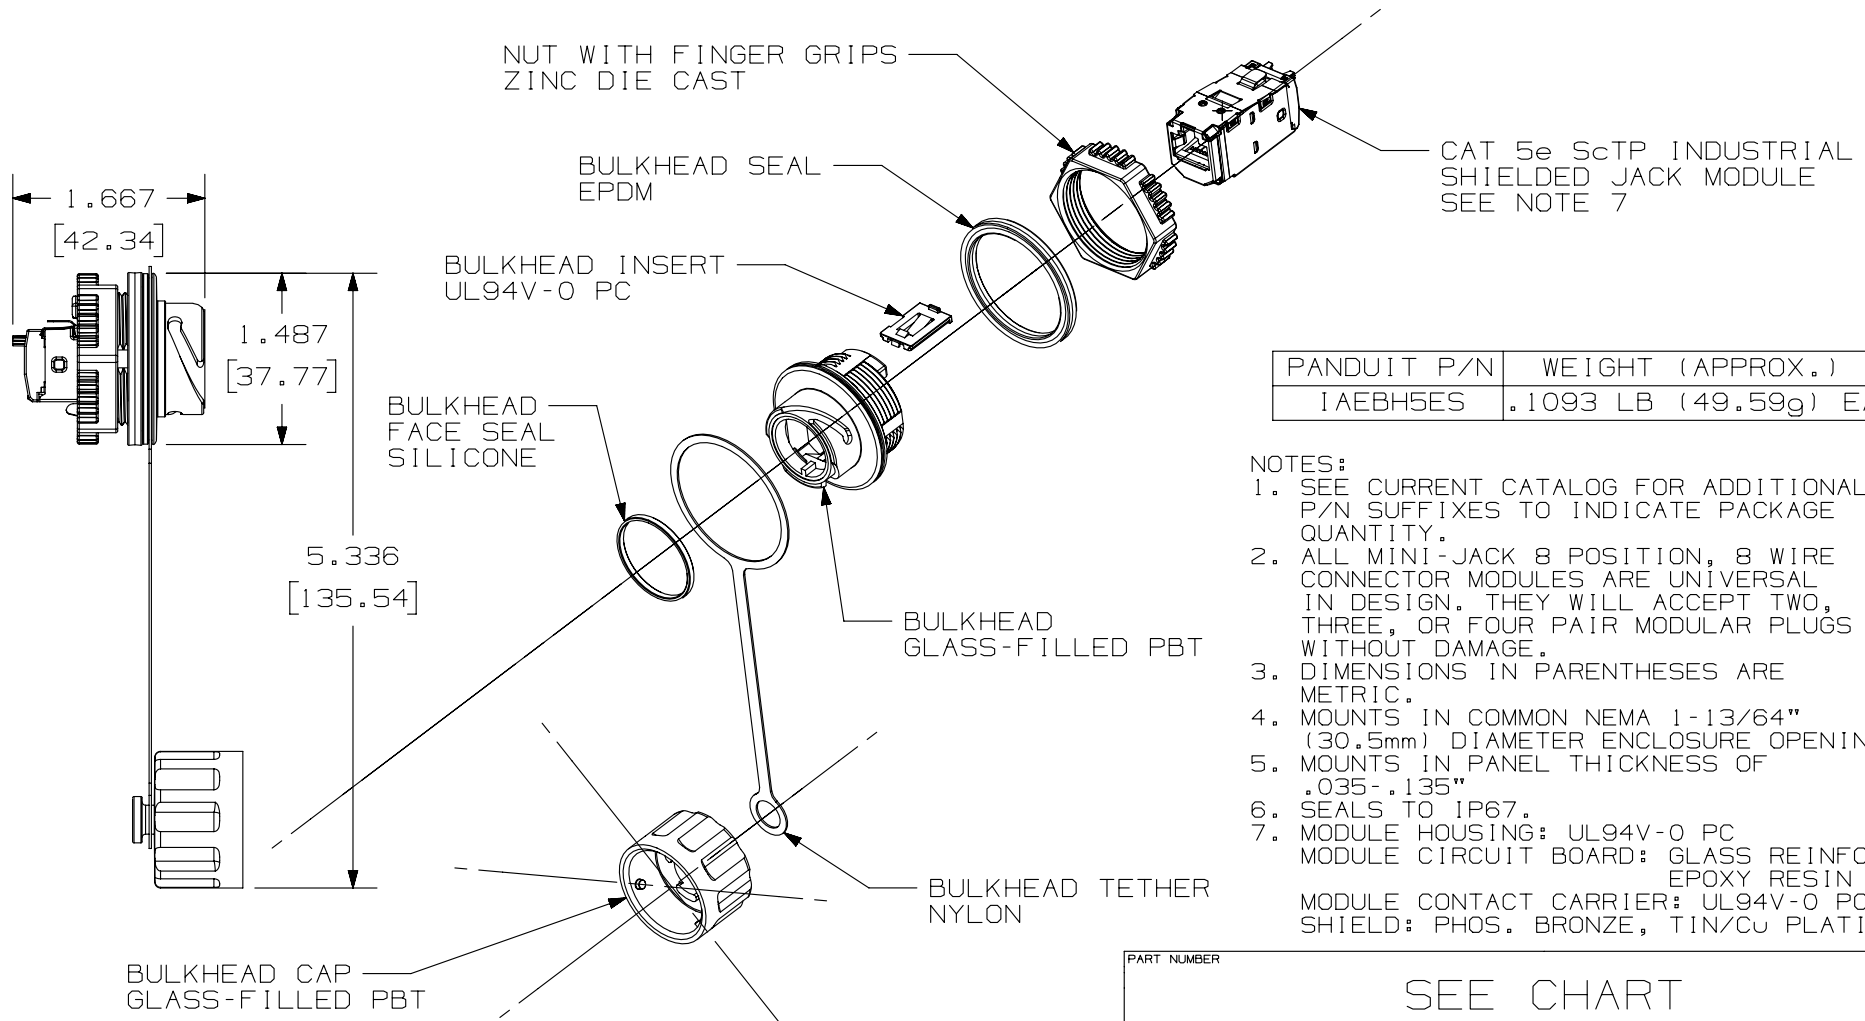

PANDUIT P/N	WEIGHT (APPROX.)
1AEBH5ES	.1093 LB (49.59g) EA

NOTES:

1. SEE CURRENT CATALOG FOR ADDITIONAL P/N SUFFIXES TO INDICATE PACKAGE QUANTITY.
2. ALL MINI-JACK 8 POSITION, 8 WIRE CONNECTOR MODULES ARE UNIVERSAL IN DESIGN. THEY WILL ACCEPT TWO, THREE, OR FOUR PAIR MODULAR PLUGS WITHOUT DAMAGE.
3. DIMENSIONS IN PARENTHESES ARE METRIC.
4. MOUNTS IN COMMON NEMA 1-13/64" (30.5mm) DIAMETER ENCLOSURE OPENING.
5. MOUNTS IN PANEL THICKNESS OF .035-.135"
6. SEALS TO IP67.
7. MODULE HOUSING: UL94V-0 PC  
MODULE CIRCUIT BOARD: GLASS REINFORCED EPOXY RESIN  
MODULE CONTACT CARRIER: UL94V-0 PC  
SHIELD: PHOS. BRONZE, TIN/CU PLATING

PART NUMBER		SEE CHART	
TITLE			
INDUSTRIALNET TXSE CONNECTOR SHIELDED JACK MODULE WITH BULKHEAD CUSTOMER DRAWING			
ITEM REVISION NAME		M01245EZ/05	
DATASET FILE NAME		M01245EZ_DC76/05B	
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN (mm)		MATERIAL:	
.x ± .xxx ± .010 (.3)		DRAWING NUMBER:	
.xx ± .03 (.8) ANGLES ±		01245-76	
THIRD ANGLE PROJECTION		SHT 1 OF 1	
DRAWN BY	DATE	CHK	SCALE
BJN	10-30-06	CEF	NONE
REV	DATE	BY	DESCRIPTION
3	5-15-14	TA	REFR
3	5-15-14	TA	REFR
REVISED TITLE BLOCK. ALL PREVIOUS REVISIONS OMITTED FOR CLARITY.			
ECN			01245-76

D101000DA/14