

# Printed-circuit board connector - MCV 0,5/ 8-G-2,54 P20THRR44C1 - 1706180

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

PCB headers, nominal current: 6 A, rated voltage (III/2): 160 V, number of positions: 8, pitch: 2.54 mm, color: black, contact surface: Gold, mounting: THR soldering, Fixed coding of the first position, can be combined with the FMC 0,5/...-ST-2,54 C1 connector



The figure shows the 10-position version

## Why buy this product

- ✓ Designed for integration into the SMT soldering process
- ✓ Additional solder anchors reduce the mechanical strain on the soldering spots
- ✓ Gold-plated contacts ensure transfer quality remains stable over the long term
- ✓ Vertical connection enables multi-row arrangement on the PCB
- ✓ Supplied in tape-on-reel packing according to IEC 60286-3 for automated mounting



## Key Commercial Data

|                        |               |
|------------------------|---------------|
| Packing unit           | 315 STK       |
| Minimum order quantity | 315 STK       |
| GTIN                   |               |
| GTIN                   | 4046356841764 |

## Technical data

### Dimensions

|                          |                |
|--------------------------|----------------|
| Length [ l ]             | 4.8 mm         |
| Width                    | 24.86 mm       |
| Pitch                    | 2.54 mm        |
| Dimension a              | 17.78 mm       |
| Width [ w ]              | 24.86 mm       |
| Height [ h ]             | 7.1 mm         |
| Length of the solder pin | 2 mm           |
| Pin dimensions           | 0.64 x 0.64 mm |

# Printed-circuit board connector - MCV 0,5/ 8-G-2,54 P20THRR44C1 - 1706180

## Technical data

### Dimensions

|        |        |
|--------|--------|
| Length | 4.8 mm |
|--------|--------|

### General

|  |                   |
|--|-------------------|
| Range of articles                      | MCV 0,5/...-G-THR |
| Insulating material group              | IIIa              |
| Rated surge voltage (III/3)            | 2.5 kV            |
| Rated surge voltage (III/2)            | 2.5 kV            |
| Rated surge voltage (II/2)             | 2.5 kV            |
| Rated voltage (III/3)                  | 32 V              |
| Rated voltage (III/2)                  | 160 V             |
| Rated voltage (II/2)                   | 160 V             |
| Connection in acc. with standard       | EN-VDE            |
| Nominal current $I_N$                  | 6 A               |
| Insulating material                    | LCP               |
| Flammability rating according to UL 94 | V0                |
| Color                                  | black             |
| Number of positions                    | 8                 |

### Standards and Regulations


|  |        |
|--|--------|
| Connection in acc. with standard       | EN-VDE |
| Flammability rating according to UL 94 | V0     |

### Environmental Product Compliance


|            |   |
|------------|---|
| China RoHS | Environmentally friendly use period: unlimited = EFUP-e |
|            | No hazardous substances above threshold values          |

## Drawings

Drilling diagram

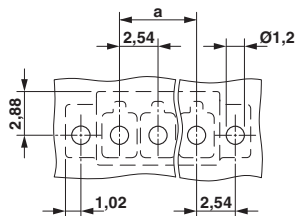

Dimensional drawing

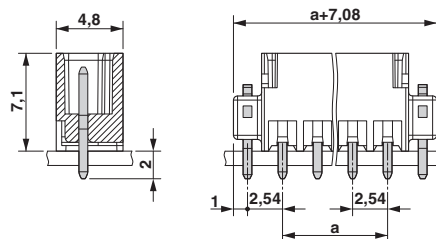

## Approvals

Approvals

# Printed-circuit board connector - MCV 0,5/ 8-G-2,54 P20THRR44C1 - 1706180


## Approvals


### Approvals


cULus Recognized / VDE Gutachten mit Fertigungsüberwachung / IECCEB Scheme / EAC


### Ex Approvals

### Approval details

|                    |   |   |                 |
|--------------------|---|---|-----------------|
| cULus Recognized   |  | <a href="http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm">http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm</a> | E60425-19920306 |
|                    |   | B   | C               |
| Nominal voltage UN |   | 150 V   | 50 V            |
| Nominal current IN |   | 6 A   | 6 A             |

|   |   |   |          |
|---|---|---|----------|
| VDE Gutachten mit Fertigungsüberwachung |  | <a href="http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx">http://www2.vde.com/de/Institut/Online-Service/VDE-gepruefteProdukte/Seiten/Online-Suche.aspx</a> | 40042258 |
|   |   |   |          |
| Nominal voltage UN                      |   | 160 V   |          |
| Nominal current IN                      |   | 6 A   |          |

|                    |   |   |              |
|--------------------|---|---|--------------|
| IECCEB Scheme      |  | <a href="http://www.iecee.org/">http://www.iecee.org/</a> | DE1-55663-B1 |
|                    |   |   |              |
| Nominal voltage UN |   | 160 V   |              |
| Nominal current IN |   | 6 A   |              |

|     |   |  |         |
|-----|---|--|---------|
| EAC |  |  | B.01742 |
|-----|---|--|---------|

Phoenix Contact 2018 © - all rights reserved  
<http://www.phoenixcontact.com>

PHOENIX CONTACT GmbH & Co. KG  
Flachsmarktstr. 8  
32825 Blomberg  
Germany  
Tel. +49 5235 300  
Fax +49 5235 3 41200  
<http://www.phoenixcontact.com>