


PERFORMANCE CHARACTERISTICS

1.5 A AT 20°C (FULLY LOADED)
 CURRENT RATING: 1 A AT 70°C (FULLY LOADED)
 RATED VOLTAGE: 500 V AC (CONT /CONT)
 OPERATING TEMPERATURE : -55°C TO 125°C
 CONTACT RESISTANCE : 20 m Ω MAX
 INSERTION FORCE: 0.75N MAX/CONT
 EXTRACTION FORCE : 0.15N MIN /CONT
 INSULATION RESISTANCE: 10⁴ MΩ MIN

NOTES

- LEAD FREE INDICATOR :LF=LEAD FREE
- PERFORMANCE LEVEL INDICATOR (REF DWG NO.BSC .201844.003)
- THIS PRODUCT IS CSA APPROVED. THIS PRODUCT IS UL RECOGNIZED.
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

P.C.B HOLE LAYOUT

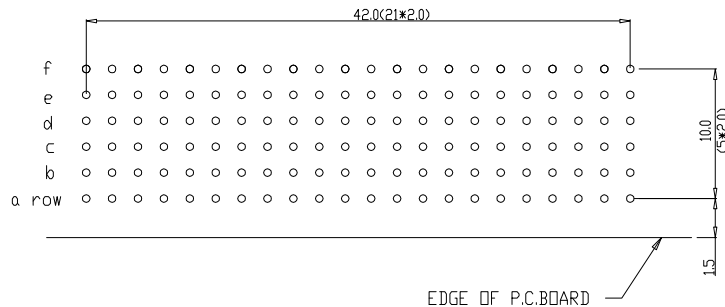

Material		Spec ref	
Mat code		✓	TOLERANCE
Heatreat			1DEC ±0.2 1DEC
Plating/Finish			2DEC ±0.1 2DEC
			ANGLES ±1°H0EKEN
Dr	15 10 97	Mfret	
Product family			size A1
Chr	Model Name		Scale 5.000
Appr	Model Revision		REL Level
rev	ecn no	dr	date
A	CONVERSION REVISION 01	KN	14-9-01
B	I05-0093	MINI	11-06-05
C	DG05-0278	kason	02-08-05
D	DG07-0362	kason	05/09/07
E	DG10-0110	NZ	05/30/10
Pro/E file		CAT.NO.	HM2R70PA5108----
FCI		MPACS 5+2R RA RCP CONN TYPE B	BS.C .201444.037
CUSTOMER DRAWING		sheet 1 of 1	

This drawing is the property of FCI. It is to be used for manufacturing purposes only. No part of this drawing may be reproduced without the written permission of FCI. Copyright © 2011.



This drawing is the property of FCI. It is to be used for manufacturing purposes only. No part of this drawing may be reproduced without the written permission of FCI. Copyright © 2011.