

SPECIFICATION CONTROL DRAWING


55PC1216

TITLE ONE CONDUCTOR CABLE, SHIELDED, JACKETED, 600 VOLT

Date 5-11-99

Revision

This specification sheet forms a part of the latest issue of Raychem Specification 55PC.

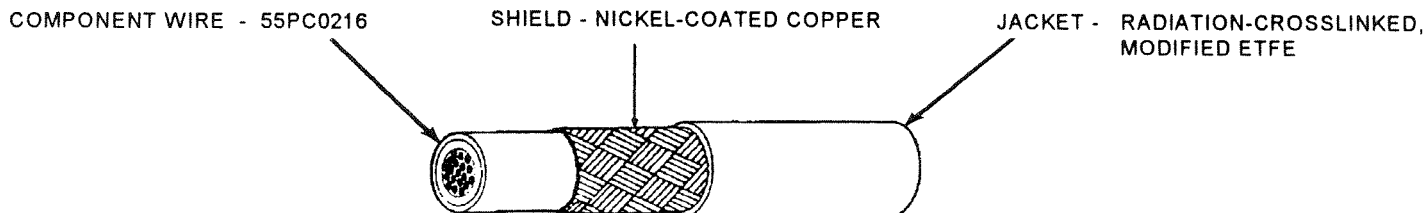

CONSTRUCTION DETAILS

PART NUMBER	CONDUCTOR SIZE (AWG)	SHIELD SIZE (AWG)	JACKET THICKNESS (in.)		DIAMETER (in.)			WEIGHT (lbs/1000 ft.)	
			LOWER SPEC LIMIT	TARGET WALL	LOWER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT	TARGET VALUE	UPPER SPEC LIMIT
55PC1216-26-*	26	38	.0050	.0060	.060	.064	.068	4.40	4.68
55PC1216-24-*	24	38	.0050	.0060	.065	.069	.073	5.28	5.57
55PC1216-22-*	22	38	.0050	.0060	.071	.075	.079	6.59	6.89
55PC1216-20-*	20	38	.0050	.0060	.080	.083	.087	8.62	8.96
55PC1216-18-*	18	38	.0050	.0060	.089	.093	.097	11.43	11.84
55PC1216-16-*	16	38	.0050	.0060	.097	.100	.104	13.68	14.11

CABLE RATINGS AND ADDITIONAL REQUIREMENTS

TEMPERATURE RATING: 200°C
 Maximum continuous conductor temperature
 VOLTAGE RATING: 600 volts (rms)
 CROSSLINK VERIFICATION: 300 ± 3°C for 1 hour
 DIELECTRIC WITHSTAND: 1500 volts (rms), 60 Hz
 JACKET COLOR: White preferred
 JACKET ELONGATION AND TENSILE STRENGTH:
 Elongation, 50% (minimum)
 Tensile Strength, 5000 lbf/in² (minimum)
 JACKET FLAWS:
 Spark Test, 1000 volts (rms), 60 Hz, 100% test
 Impulse Dielectric Test, 6.0 kV (peak), 100 % test

SHIELD COVERAGE: 85% (minimum)
 VOLTAGE WITHSTAND TEST (POST ENVIRONMENTAL):
 1000 volts (rms), 60 Hz, 1 minute

PART NUMBER:
 The "*" in the part numbers above shall be replaced by a color code designator with a dash separating the component wire color from the jacket color.
 Example: AWG 22, white component wire;
 white jacket: 55PC1216-22-9-9

COLOR AND COLOR CODE DESIGNATORS SHALL BE IN ACCORDANCE WITH MIL-STD-681.