



MODEL: SP-3605

PRODUCT: Dynamic Speaker

EDITION: A/2016

Soberton Inc.

THIS SPECIFICATION COVERS OUR PRODUCT OF DYNAMIC SPEAKER UNIT FOR MOBILE PHONE USE

DYNAMIC SPEAKER ELECTROACOUSTIC CHARACTERISTICS


sound pressure level	90±3dB SPL @ 0.6, 0.8, 1.0, 1.2, 1.5 and 2.0KHz in average (0dB SPL=20μPa)
measuring condition	0.1W (Sine wave) 10cm measured with baffle shown in Fig.1
ac impedance	8±15%Ω (@ 2 KHz 1V) without baffle
frequency response curve	As shown in Fig.2
response frequency	550 ± 20%Hz @ 1V. (Without Baffle)
rated noise power	1W
short-term max. power	1.5W must be normal at a white noise (1W, F ₀ -20KHz) for 1 minute
operation test	Must be free audible noise (buzzes and rattles) (300 ~5KHz frequency range, input level up to 2.83Vrms)
distortion	Less than 5% @1KHz , 0.1M , 0.1W frequency range, input level up to 0.1W
dimension	ø36 x 5.0mm

GENERAL SPECIFICATIONS

operating temperature range	-20°C ~ +60°C
standard test conditions	
temperature	17°C ~ 25°C
relative humidity	45% ~ 80%(RH)

MEASURING METHOD (SPEAKER MODE) (Figure 1)

Standard test condition of speaker

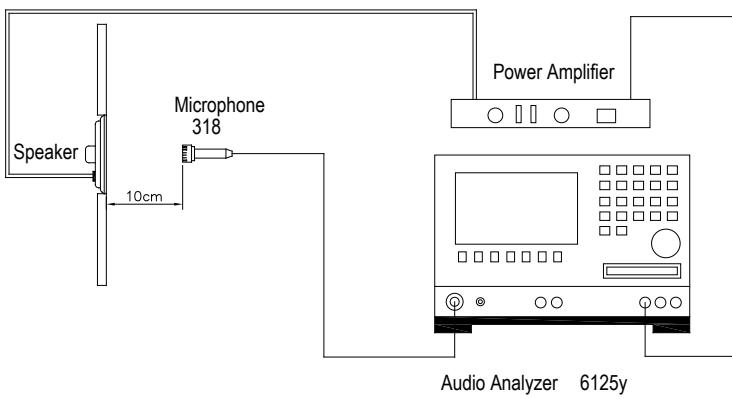

TEST CONDITION

STANDARD	
temperature	15 ~ 35°C
relative humidity	45% ~ 85%
atmospheric pressure	860mbar to 1060mbar.
STANDARD TEST FIXTURE	
input power	0.1W (0.89V)
zero level	-dB
mode	TSR
potentiometer range	50dB
sweep time	0.5sec




MODEL: SP-3605

PRODUCT: Dynamic Speaker

EDITION: A/2016

Soberton Inc.

TYPICAL FREQUENCY RESPONSE CURVE (Figure 2)

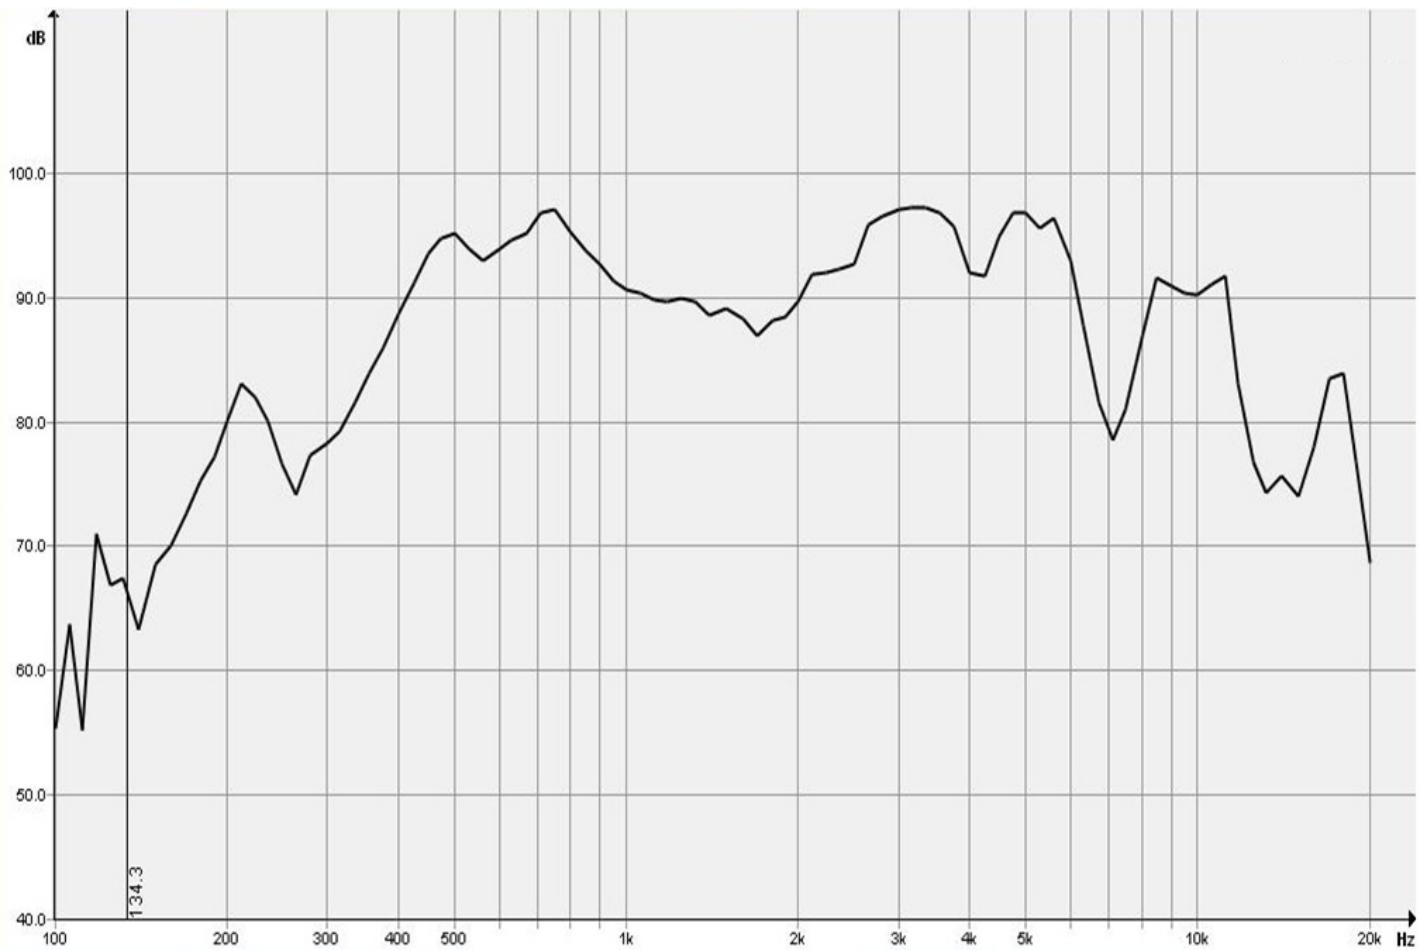



MODEL: SP-3605
PRODUCT: Dynamic Speaker
EDITION: A/2016

Soberton Inc.

RELIABILITY TESTS

The sound pressure as specified shall neither deviate more than ± 3 dB from the initial value, nor have any significant damage after any of following testing.

HIGH TEMPERATURE TEST

high temperature	+60 ± 2 °C
duration	96 hours

LOW TEMPERATURE TEST

low temperature	-20 ± 2 °C
duration	96 hours

HEAT SHOCK TEST

high temperature	+60 ± 2 °C
low temperature	-20 ± 2 °C
duration	1 hour
changeover time	< 30 seconds
cycle	100

HUMIDITY TEST

temperature	+40 ± 2 °C
relative humidity	90~95%
duration	96 hours

TEMPERATURE CYCLE TEST

temperature	-20°C +60°C
duration	45 minutes 45 minutes
temperature gradient	1~3°C/min.
cycle	25

DROP TEST

mounted with dummy set mass	100 g
height	1.5 m
cycle	6 (1 each plain) onto the concrete board

LOAD TEST

noise signal	White noise (EIA filter)
input power	1W
duration	1 hour





MODEL: SP-3605
PRODUCT: Dynamic Speaker
EDITION: A/2016

Soberton Inc.

DIMENSIONS

Tolerance: ± 0.5 (unit: mm)

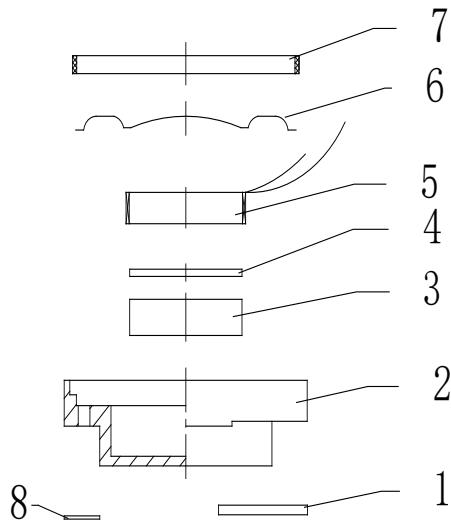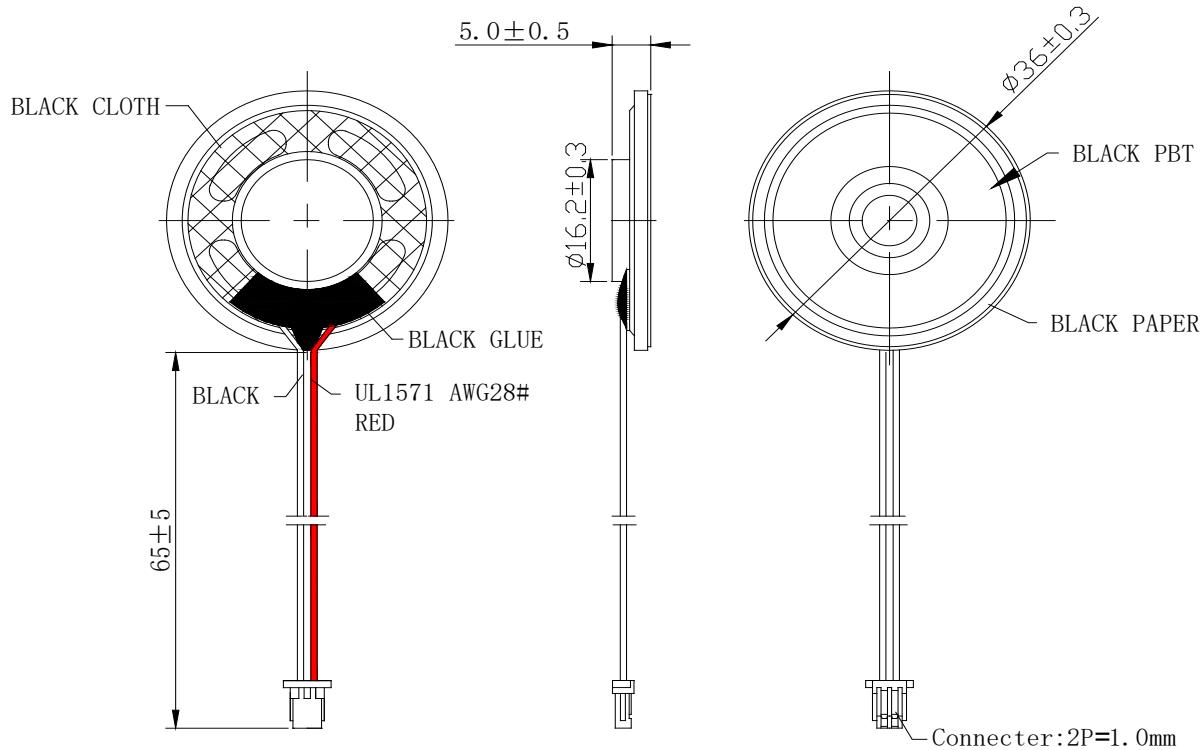

no	item	material	quantity
1	PCB	FR-4	1
2	Frame	SPCC	1
3	Magnet	$\phi 12.5 \times 1.5$ -N38Nd Fe B	1
4	Plate	$\phi 12.7 \times 0.8$ SPCC	1
5	Voice Coil	13.3-2.4-7.4Ω	1
6	Diaphragm	black PET	1
7	Gasket	black paper	1
8	Silk Screen	black cloth	1



MODEL: SP-3605
PRODUCT: Dynamic Speaker
EDITION: A/2016

Soberton Inc.

PACKING

42 pcs per box

24 units per box

Total:1000 pcs per box

Size:37x28x28cm

$$42\text{PCS} \times 24 - 8 = 1000\text{PCS}$$

