

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION
 © COPYRIGHT 19 BY AMP INCORPORATED. ALL INTERNATIONAL RIGHTS RESERVED.

| | | | | | | | | |
|-----|------|---|---|-----------|-----|---------------------------------|---------|------|
| LOC | DIST | P | F | REVISIONS | | | DATE | APPD |
| AJ | 16 | | | ZONE | LTR | DESCRIPTION | | |
| | | | | | C | OBS -1,-6 & -8 PER 0E10-0116-99 | 07FEB00 | M0 |

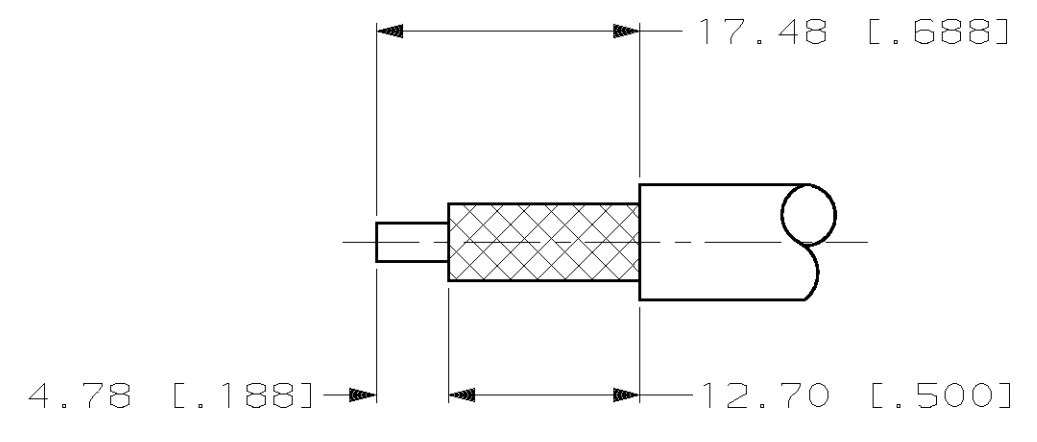
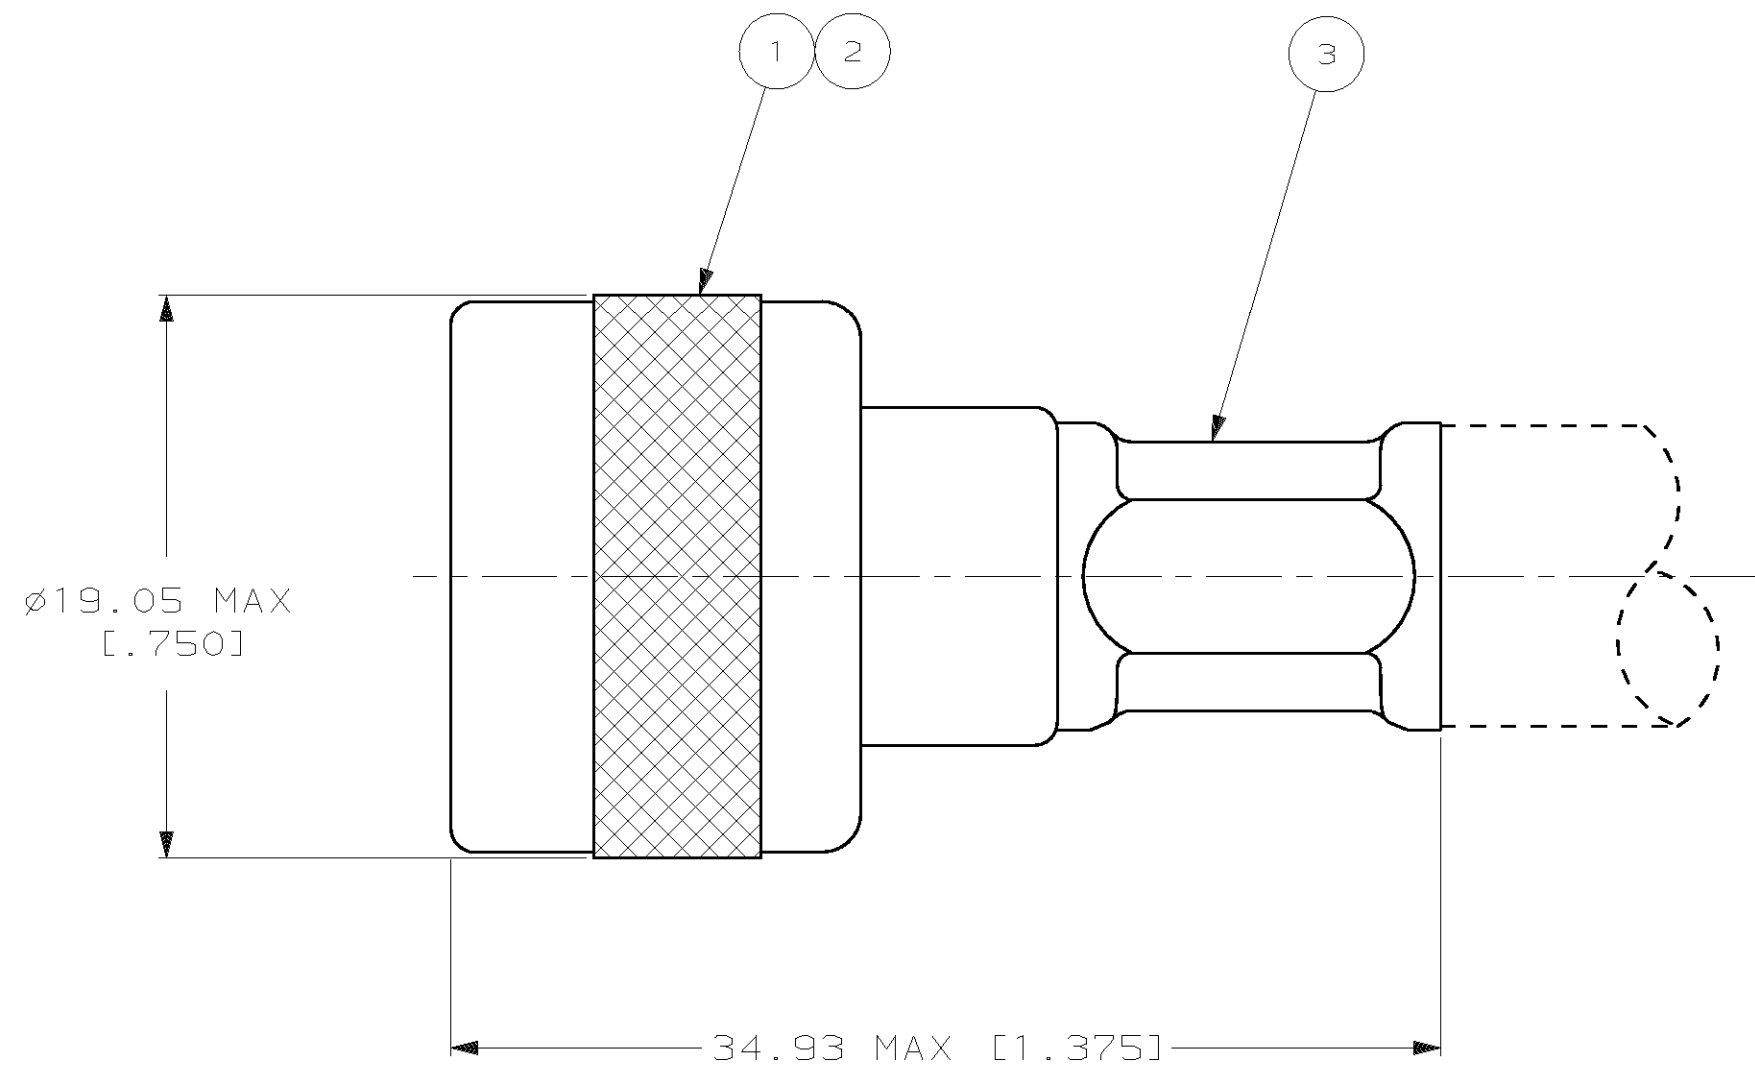


FIG 1

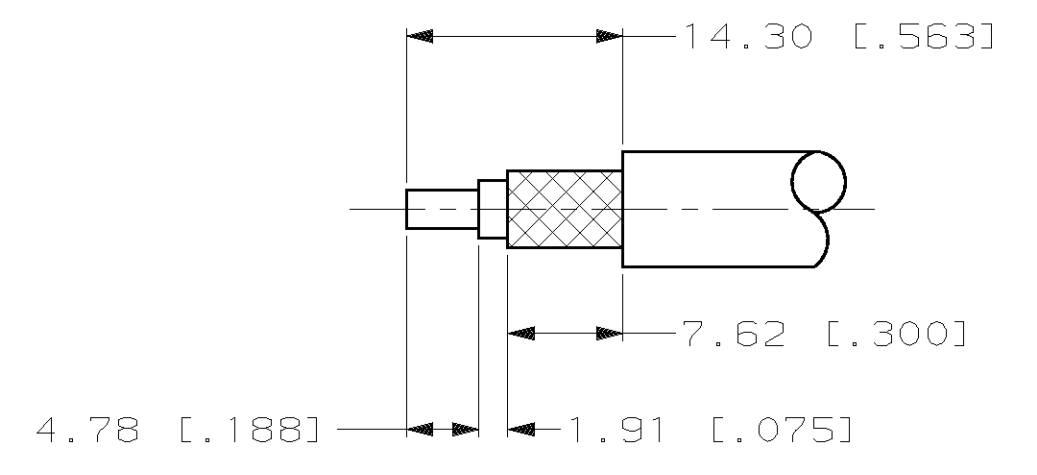


FIG 3

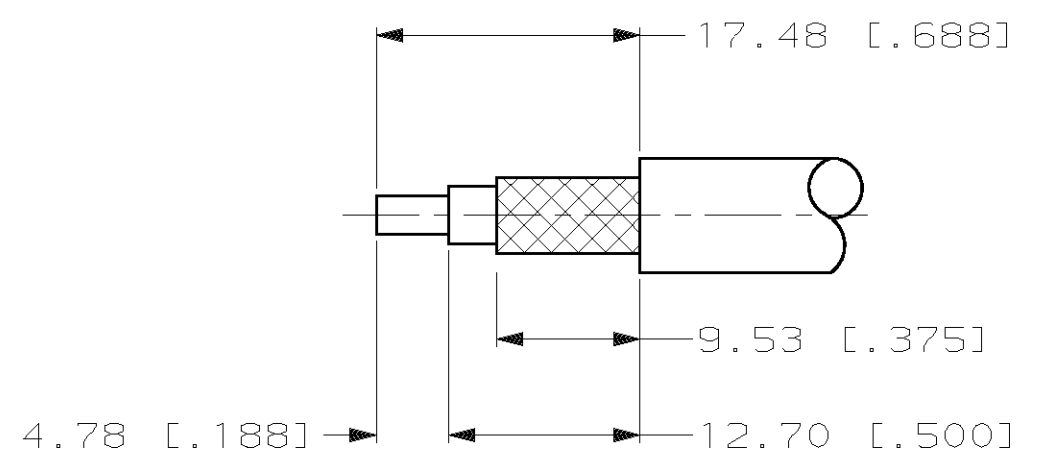


FIG 2

RECOMMENDED STRIP LENGTHS

1. USE HAND TOOL: PRO-CRIMPER #58434-1

| | | | | | | | | |
|----------|---------|--------------|--------------------------|-----------------------------|--------------------|--------------------|----------------------|----------|
| | 58436-1 | FIG 3 | RG-58/U & BELDEN YR20621 | CONTACT=.068;BRAID=.213 | 221132-3 | 414164-4 | 227112-6 | 414160-9 |
| OBSOLETE | 58436-1 | FIG 3 | RG-59/U & 62/U | CONTACT=.068;BRAID=.255 | 2-221132-0 | 414164-6 | 227112-5 | 414160-8 |
| | 58436-1 | FIG 3 | RG-55/U,142/U & 223/U | CONTACT=.068;BRAID=.213 | 2-221132-6 | 414164-4 | 227112-6 | 414160-7 |
| OBSOLETE | 58485-1 | FIG 2 | RG-216/U | CONTACT=.068;BRAID=.429 | 2-221132-9 | 414164-2 | 227112-1 | 414160-6 |
| | 58485-2 | FIG 2 | RG-393/U | CONTACT=.128;BRAID=.429 | 2-221132-9 | 414163-2 | 227112-3 | 414160-5 |
| | 58485-2 | FIG 1 | BELDEN 8214 | CONTACT=.128;BRAID=.429 | 2-221132-3 | 414163-4 | 227112-3 | 414160-4 |
| | 58485-1 | FIG 2 | BELDEN 9880 | CONTACT=.100;BRAID=.429 | 2-221132-9 | 414116-4 | 227112-1 | 414160-3 |
| | 58485-1 | FIG 2 | RG-9/U & 214/U | CONTACT=.100;BRAID=.429 | 2-221132-9 | 414116-4 | 227112-1 | 414160-2 |
| OBSOLETE | 58485-1 | FIG 1 | RG-8/U & 213/U | CONTACT=.100;BRAID=.429 | 2-221132-3 | 414116-4 | 227112-1 | 414160-1 |
| | DIE SET | STRIP LENGTH | FOR USE WITH: | HEX CRIMP HEIGHTS IN INCHES | ③ FERRULE QTY=1 | ② CONTACT QTY=1 | ① PLUG ASSY QTY=1 | PART NO |

| | | | | |
|---|----------|----------------------|--|----------------------|
| DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES] TOLERANCES ON: 2 PLC DEC ± - 3 PLC DEC ± 0.41 [.016] ANGLES ± - | | DR M. SNEED 3-22-91 | AMP Incorporated Harrisburg, PA 17105-3608 | |
| MATERIAL - | FINISH - | CHK 8-6-91 R. HENRY | | |
| | | APPD 8-6-91 M. SNEED | NAME PLUG, HEX CRIMP, COMMERCIAL, SERIES N | |
| | | PRODUCT SPEC - | SIZE © 00779 | DRAWING NO 414160 |
| | | APPLICATION SPEC - | SCALE 4:1 | SHEET 1 OF 1 |
| | | WEIGHT - | PART NO | |